

03-10-00

A

Please type a plus sign (+) inside this box → ☐PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE
Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.**UTILITY
PATENT APPLICATION
TRANSMITTAL**

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. TRYM0001C

First Inventor or Application Identifier Torruba-Saez

Title Method and Apparatus for Secure Distribution ...

Express Mail Label No. EL540886423US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 42]
(preferred arrangement set forth below)
- Descriptive title of the Invention
 - Cross References to Related Applications
 - Statement Regarding Fed sponsored R & D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings (if filed)
 - Detailed Description
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 25]
4. Oath or Declaration [Total Pages 2]
- a. ☐ Newly executed (original or copy)
 - b. ☒ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
 - i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

*** NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY
FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT
IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).****ADDRESS TO:**Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
 - b. ☐ Paper Copy (identical to computer copy)
 - c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☐ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement ☒ Power of
(when there is an assignee) Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS
Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement(s) ☒ Statement filed in prior application,
(PTO/SB/09-12) Status still proper and desired
14. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☒ Other: Copy of REV. of POA/ Grant of New
mailed to PTO on 3/9/00

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. 09 / 328,737
Prior application information: Examiner Unassigned Group / Art Unit: 2776

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS☒ Customer Number or Bar Code Label

22862

or ☐ Correspondence address below

(Insert Customer No. or Attach bar code label here)

Name

Address

City

State

Zip Code

Country

Telephone

Fax

Name (Print/Type)

Michael A. Glenn

Registration No. (Attorney/Agent)

30,176

Signature

Date

3/9/00

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Applicant or Patentee: Andres Torrubia-Saez

WHITMAN BREED ABLE JTT & MORGAN LLP

Serial or Patent No.: 09/328,737

File No.: 0088830-0004

Filed or Issued: June 9, 1999

For: METHOD AND APPARATUS FOR SECURE

Page 1 of 2

DISTRIBUTION OF SOFTWARE

VERIFIED STATEMENT (DECLARATION) CLAIMING SMALL ENTITY STATUS
37 CFR 1.9(f) and 1.27(b)) - INDEPENDENT INVENTOR

As a below-named inventor, I hereby declare that I qualify as an independent inventor as defined in 37 CFR 1.9(c) for purposes of paying reduced fees under Section 41(a) and (b) of Title 35, United States Code, to the Patent and Trademark Office with regard to the invention, entitled described in application Serial No. 09/328,737, filed June 9, 1999.

I have not assigned, granted, conveyed or licensed and am under no obligation under contract or law to assign, grant, convey or license, any rights in the invention to any person who could not be classified as an independent inventor under 37 CFR 1.9(c) if that person had made the invention, or to any concern which would not qualify as a small business concern under 37 CFR 1.9(d) or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization to which I have assigned, granted, conveyed, or licensed or am under an obligation under contract or law to assign, grant, convey, or license any rights in the invention is listed below.

☐ no such person, concern, or organization

☒ persons, concerns or organizations listed below *

*NOTE: Separate verified statements are required from each named person, concern or organization having rights to the invention averring to their status as small entities (37 CFR 1.27).


FULL NAME Trymedia Systems, Inc.
ADDRESS 150 West 56th Street, Suite 4405, New York, NY 10019
☐ INDIVIDUAL ☒ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

FULL NAME _____
ADDRESS _____
☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

FULL NAME _____
ADDRESS _____
☐ INDIVIDUAL ☐ SMALL BUSINESS CONCERN ☐ NONPROFIT ORGANIZATION

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

<u>Andres Torrubia-Saez</u> NAME OF INVENTOR	<u>NAME OF INVENTOR</u>	<u>NAME OF INVENTOR</u>
 Signature of Inventor	<u>Signature of Inventor</u>	<u>Signature of Inventor</u>
<u>5-AUG-1999</u> Date	<u>Date</u>	<u>Date</u>

METHOD AND APPARATUS FOR SECURE DISTRIBUTION OF SOFTWARE

CROSS REFERENCE TO RELATED APPLICATIONS

This application is a Continuation of co-pending U.S. Application No. 09/328,737 filed June 9, 1999, which claims benefit of U.S. Provisional Application No. 60/131,179, filed April 30, 1999.

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The present invention relates to secure methods for distributing software and data objects, as well as to access-controlled software and data objects, and computer systems which practice or utilize any of the foregoing.

DESCRIPTION OF THE PRIOR ART

Commercial distribution of software and data (such as media files and reports) by data communication is a very rapidly growing form of commerce. It is both efficient and convenient as compared to traditional distribution methods.

Distribution of software and data on a "Try and Buy" basis permits the user to run or "demo" the product before committing to buy it. This assumes that the software licensor or media distributor somehow exercises control over the use of the product at least until the recipient buys the right to use it. The widespread availability of data communication, especially via the Internet, also emphasizes the need for the software licensor and other media distributors to exercise control over their products.

One technique for controlling access to executables involves "wrapping" the executable to be controlled within a second program, termed a "wrapper". In effect,

the executable to be controlled and the wrapper are joined into one executable, in which the wrapper is executed first and controls access to the wrapped executable.

However, conventional software protection systems based on wrapping are easily
5 circumvented by class attacks which destroy the security otherwise afforded by a given type of wrapper. This is achieved through a modification of only a single part of the wrapper which is identical in all wrappers of that type. Generic unprotectors can easily be obtained via the Internet.

10 Another form of attack is the so-called "dump attack" in which the attacker waits for the wrapped application to be decompressed and or decrypted in memory, and then dumps it to a hard disk in its original, unprotected state. Programs to carry out dump attacks also are easily obtained via the Internet.

15 A widely used security device injects new code into an existing executable in order to control access to the latter. When the executable is run, a specially-designed DLL executable is loaded for controlling access to the existing executable. The presumed "security" afforded by this scheme is circumvented by eliminating the call to the DLL or by modifying the DLL itself.

20 It has been proposed to package the objects with executables which carry out such control functions.

A dedicated user program is required to decrypt, decompress, and format the data
25 for display by a monitor, and/or audio reproduction device. Consequently, it is necessary to provide a different user program for each data format which may be encountered. For example, a different program is required to play an AVI file than is used to display a BMP or JPG file.

30 It would, therefore, be desirable to provide methods, software and computer systems which control access to data objects, but do not require different programs to display or present objects in various formats. It would also be desirable to provide methods, software and computer which control access to executables but which are not subject to class attacks or dump attacks.

SUMMARY OF THE INVENTION

As used in this application, the following terms shall have the indicated meanings:

Software: includes both data and programming instructions.

5 Package: any software to be stored, accessed, loaded, assembled, prepared for transmission or received as a unit.

Object: any software to be run, utilized, or displayed as a unit.

Feature: a "feature" of an object is any function, instruction, capability or information included therein, or controlled or enabled thereby.

10 Computer System: includes a single computer or multiple cooperating computers, and includes one or more PC's, mainframes, digital processors, workstation, DSP's or a computer network or networks, or a computer internetwork.

15 "Wrapping": joining one executable with another executable in a package, one of the executables (termed the "Wrapper") being executed first and controlling access to the other executable.

20 "Watermark": includes information in software which either enables identification of an owner, licensee, distributee, or another having rights in or an obligation in connection with the software, or enables identification of a version or copy of the software. Usually, but not necessarily, the watermark is imperceptible and preferably is difficult to remove from the software.

25 "Padding Area": a space within a software object or package which does not contain required code or data.

30 In accordance with an aspect of the present invention, a method of securely distributing software with limited usage rights is provided. The method comprises: supplying software for distribution to a user, the software including access control means for preventing at least some usage thereof on a computer system without the use of a first access control code; producing the first access control code based on selected information characteristic of the predetermined computer system; and
35 supplying the first access control code to the predetermined computer system to enable the at least some usage of the software.

 In accordance with another aspect of the present invention, an executable object is provided, comprising: a first code portion comprising first predetermined instructions;
35 and a second code portion comprising loading instructions required for loading the first code portion in a memory of a computer system to be programmed thereby,

the second code portion being operative to control the computer system to erase the loading instructions from memory upon loading the first code portion in memory.

5 In accordance with still another aspect of the invention, a software package is provided, comprising: a first executable object, and a wrapper for the first executable object, the wrapper being operative to erase predetermined software from the first executable object when it has been loaded in running format in memory.

10 In accordance with a further aspect of the present invention, a computer system is provided, comprising: a processor; a memory; an instruction input device; and an executable stored in the computer system, the executable having a first code portion comprising first predetermined instructions for execution by the processor, and a second code portion including loading instructions, the processor being
15 operative upon receipt of a predetermined instruction from the instruction input device to load the second code portion in the memory, the processor being operative under the control of the loading instructions to load the first code portion in the memory and operative under the control of the second code portion to erase the loading instructions from the memory upon loading the first code portion in memory.

20 In accordance with yet another aspect of the present invention, a software package comprises: a first object providing a first set of a plurality of features; a second object providing a second set of a plurality of features including some, but less than all, of the features included in the first set; and an access control portion affording selective
25 access to the first software object and/or the second software object.

In accordance with still another aspect of the present invention, a software package is provided comprising: a first executable object, and a wrapper for the first executable object, the first executable object being operative, while running to access a feature
30 of the wrapper; the wrapper being operative to supply the feature to the first executable object when the feature is accessed thereby.

In accordance with yet another aspect of the invention, a software package is provided comprising: a first executable object, and a wrapper for the first executable
35 object, the first executable object being operative to call a predetermined feature external thereto; the wrapper being operative upon a call of the predetermined

feature by the first executable object to transfer program execution control to a predetermined address within the wrapper to control access by the first executable object to the predetermined feature.

5 In accordance with a still further aspect of the present invention, a computer system is provided, comprising; a processor; a memory; an instruction input device, and a software package stored in the computer system, the software package having a first object providing a first set of a plurality of features, a second object providing a second set of a plurality of features including some, but less than all, of the features
10 included in the first set, and an access control portion; the processor being operative to load the software package in the memory, the processor being further operative to request access to a selected one of the first and second objects in response to a predetermined instruction from the instruction input device, the access control portion being operative to selectively control access to the selected object.

15 In accordance with still another aspect of the invention, a software package is provided, comprising: a first object providing a first set of a plurality of features, the first object being encrypted, and a second object providing a second set of a plurality of features including some, but less than all, of the features included in the
20 first set, the second object being unencrypted.

In accordance with yet still another aspect of the present invention, a driver executable is provided, comprising: first code for accessing a requested file from a storage device; second code for detecting the presence of a predetermined
25 identifier in the accessed file; and decryption code for decrypting at least a portion of the accessed file in response to detection of the identifier therein.

In accordance with a still further aspect of the present invention, a software package is provided, comprising: a software object having a first set of features and a second
30 set of features, the first set of features being encrypted and the second set of features being unencrypted; and a signature readable by a predetermined executable serving to control access to the encrypted first set of features.

In accordance with a yet still further aspect of the present invention, a computer
35 system is provided. The computer system comprises: a processor; a memory; an instruction input device; a storage device storing a file; an operating system; a driver

executable; and a device driver serving to control access to the storage device; the instruction input device being operative to input a first request for access to the file; the operating system serving to control the processor to direct a second request for the file to the driver executable in response to the first request for access; the driver executable being operative in response to the second request to control the processor to direct a third request for the file to the driver; the driver being operative in response to the third request to control the processor to read the file from the device to the memory and thereupon return control of the processor to the driver executable; the driver executable being operative upon return of control thereto to control the processor to examine the file in memory to detect the presence of a predetermined identifier in the file and to decrypt at least a portion of the file in response to detection of the predetermined identifier therein.

The foregoing, as well as further aspects of the invention and advantages thereof, will be apparent in the following detailed description of certain illustrative embodiments thereof which is to be read in connection with the accompanying drawings forming a part hereof, and wherein corresponding parts and components are identified by the same reference numerals in the several views of the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a computer system having a single CPU;

Figure 2 is a flow diagram illustrating a method of producing software in the form of a package including a first object, a second object produced from the first object and usage authorization information governing use of the first and second objects;

Figures 3A through 3C illustrate image objects to be included in a package and produced in multiple versions each including a respectively different amount of information, produced by varying the amounts of noise therein;

Figures 3D through 3F illustrate multiple versions of the same image object of Figure 3A in which the amount of information in each version is varied by removing lines and/or portions of lines from certain versions;

Figures 3G through 3I illustrate multiple versions of the image object of Figure 3A in which the amount of information is varied by filtering certain versions;

Figures 3J through 3L illustrate multiple versions of the image object of Figure 3A in which the amount of information is varied by encrypting portions of certain versions;

Figure 4A is a spectral diagram of a segment of an audio signal to be included as a data object is a package, while Figure 4B is a spectral diagram of another version of the segment having relatively less information than the segment of Figure 4A;

Figure 5A illustrates a data format for use in storing usage authorization information governing the use of various objects in a package, while Figures 5B and 5C are tables providing examples of the types of data included in such usage authorization information;

Figure 6 is a diagram illustrating a package produced according to the method of Figure 2 wherein a first object whose use is restricted is encrypted;

Figure 7 is a flow diagram of another method for producing software in the form of a package, wherein multiple objects are watermarked, compressed and encrypted and usage authorization information is watermarked and encrypted;

Figures 8A through 8D are used to describe methods for watermarking software carried out in the method of Figure 7;

Figures 8A and 8B schematically illustrate a portion of an executable object and a portion of a code section, to be watermarked;

Figures 8C and 8D schematically illustrate methods for watermarking executable objects and code sections of the type illustrated in Figures 8A and 8B;

Figures 9A through 9I are used to describe methods for compressing and encrypting software carried out in the method of Figure 7;

Figure 10 is a diagram of software in the form of a package produced by the method of Figure 7;

Figure 11A is a diagram of software in the form of a package including first and second executable or program objects;

- 5 Figure 11B is a diagram of an executable notifier included in the package of Figure 11A, while Figure 11C is a diagram of the compressed program objects and access control information of the package of Figure 11A;

10 Figure 12 is a flow diagram of a method for secure distribution of software by data communication;

Figure 13 is a flow diagram of a method for secure distribution of software stored in a storage medium;

- 15 Figure 14 is a schematic diagram illustrating the use of a driver executable for controlling access to predetermined data objects in a computer system;

Figure 15 is a flow diagram of a method of printing a data object to which access is controlled;

- 20 Figure 16 illustrates the software package of Figures 11A through 11C when it is first loaded in the memory of a user's computer system; and

- 25 Figure 17 illustrates portions of the software package of Figure 16 after the executable notifier has loaded a selected one of the program objects in running condition in the memory of the user's computer system; and

Figure 18 illustrates a method for controlling the usage of a given program by means of code in the executable notifier.

30

DETAILED DESCRIPTION OF CERTAIN PREFERRED EMBODIMENTS

- 35 With reference to Figure 1, a computer system 100 is illustrated schematically having one or more central processing units (CPU) or processors 110, a display 120, other input/output (I/O) apparatus 130 (such as network or Internet connection), and a memory 140 in which executable files 150 and data files 160 may be loaded for

execution or use by processor 110. The computer system 100 also includes a non-volatile mass storage apparatus, such as a hard disk drive (not shown for purposes of simplicity and clarity).

5 Computer system 100 functions to produce software and to distribute the produced software to users, as well as to produce and distribute various other types of executables and data for controlling access to the produced software and carry out associated license purchasing transactions with users' computer systems. The manner in which system 100 carries out these functions will be apparent from the
10 following discussion in connection with the associated drawings.

Figure 2 illustrates an exemplary method for producing a software package for distribution either on a record medium or by data communication, for example, via the world wide web or a dial-up service. The product thus generated includes
15 multiple objects which either are data objects, such as media or multi-media objects, or are executable objects, such as games, applications or utilities. The method of Figure 2 is especially useful for generating try-and buy packages.

In the method of Figure 2, a first object is used to produce one or more second
20 objects in a step 210. In certain embodiments of this particular method, the one or more second objects are produced by removing features from the first object. In certain other embodiments, one or more first objects instead are produced from a second object by adding features to the second object.

25 Various embodiments of step 210 are illustrated in Figures 3A through 3L in which a first data object in the form of a digitized picture is used to produce multiple second objects having progressively less picture information.

In a first embodiment, a first picture object 310 shown in Figure 3A is used to
30 produce a somewhat degraded version 316 as shown in Figure 3B by the addition of noise to object 310. A further degraded version of object 310 is illustrated in Figure 3C as picture object 320 which is produced either through the addition of noise to object 310 or the addition of further noise to object 315.

35 A second embodiment of step 210 is illustrated in Figures 3D through 3F. The first picture object 310 is shown again in Figure 3D and is used to produce the

moderately degraded version 325 as shown in Figure 3E by removing lines or portions of lines from the data object 310. A further degraded version 330 of object 310 shown in Figure 3F is produced by removing a relatively greater number of lines or portions of lines from object 310 or by removing still further lines from version 325. In still other embodiments, the degraded versions are produced by removing multiple contiguous lines.

A further embodiment of step 210 is illustrated in Figures 3G through 3I in which the object 310 is subjected to low-pass filtering in order to remove fine details, such as the edged of objects. A moderately degraded version 335 as shown in Figure 3H is produced by low-pass filtering of object 310 with a relatively high cut-off point, while a further degraded version 340 shown in Figure 3I is produced by low-pass filtering of object 310 with a relatively lower frequency cut-off point.

Yet another embodiment of the step 210 is illustrated in Figures 3J through 3L in which the object 310 is used to produce a somewhat degraded version 345 shown in Figure 3K by encrypting groups of contiguous horizontal lines with a first encryption key. When the object is displayed without decryption, it will appear as version 345 as shown in Figure 3K in which the encrypted portions are displayed as noise. Additional portions are encrypted to produce the still further degraded version 350 as shown in Figure 3L, the additional portions being encrypted with a second key or with the same key used to encrypt the portions shown in Figure 3K. Differently defined regions, such as blocks, or vertical lines or regions, or else arbitrarily defined regions, may be selected for encryption.

In still other embodiments, either one, three or more degraded versions of a first picture object are produced.

In yet still further embodiments, further versions of a first picture object are produced by adding features thereto. For example, new elements can be added to the first picture object from other sources.

In other embodiments, the further versions are produced by substituting pixels having further information, such as finer detail, or additional picture elements.

An embodiment of step 210 for producing multiple versions of an audio object is illustrated in Figures 4A and 4B. Figure 4A provides an exemplary spectral energy distribution 410 for a segment of a first audio object. A modified or degraded version of the Figure 4A segment is illustrated in the spectral energy distribution of 420 of Figure 4B. In Figure 4B, the hatched-line frequency bands 430 represent portions of the energy spectrum which are removed, for example by filtering, by removal of certain energy bands from an FFT transformed version of the segment, by removal of certain coefficients from a direct cosine transformation of the segment or otherwise. In still other embodiments, sub bands of the audio signal in MP3 format are easily removed or encrypted to produce a degraded version thereof.

In the case of an executable object, step 210 is carried out in any of a number of ways. In one embodiment, the overall coding of a first executable object is modified to produce a modified executable object lacking one or more features of the first. This may be done by removing routines necessary to perform the disabled features or bypassing such routines. In another embodiment, only one section of the first executable object is modified. For example, executable objects often are provided with resource sections which are readily modified to enable or disable its functions.

In the method of Figure 2, once the first and second objects have been prepared/obtained, the first object is encrypted to provide one means of controlling access thereto. In a try-and-buy transaction, as will be seen in greater detail below, the user is permitted free access to the second object having fewer than all of the features he needs, in order to assess his interest in acquiring rights to the first object which has all of the features he requires. Encryption is a relatively strong protection. The encryption step 220 is carried out so that a unique key or decryption executable if required to decrypt the first object. The key or decryption executable is produced by a server using selected information characteristic of the user's computer system, so that in order to decrypt the first object, both the key and the decryption executable as well as the selected information are required. This key or decryption executable is stored in the system 100 and is not included in the package produced in the method of Figure 2. Rather, once the user has purchased the right to use the first object, the system 100 transmits the key or executable to the user's system which stores the key or executable in a package other than that of the first object.

In step 230 of the Figure 2 method, data specifying permitted uses for each object and their price, if any, are produced and assembled according to each object. That is, for each object included in the package (or external to the package and referenced thereby) and for each permitted user thereof, a record 510 such as that illustrated in Figure 5A is produced or accessed from storage in the system 100.

In a first field 520 of the record 510, data is provided identifying the object to which the record pertains. In a second field, 530, the particular usage of the object for which the record is provided is identified. Examples of various usage types which can be identified in field 530 are listed in the table of Figure 5B.

A third field 540 of the record 510 specifies the extent of the permitted usage for the price specified in the fourth field 550 of the record 510. As indicated in the left-hand column of the table provided in Figure 5C, the extent of usage may be expressed in various ways, for example, by duration of use or numbers of usages. The price specified in the fourth field 550 corresponds to the authorized extent of usage, as can be seen from the table of Figure 5C. For example, if the extent of authorized usage is N times, the price may represent a specified amount of money for each time or for a number of times.

In step 240 of Figure 2, the first and second objects, and the usage authorization information are assembled in a package with a notifier section and, in packages having data objects, a signature. An exemplary structure for the package thus produced is illustrated in Figure 6, wherein the notifier, indicated as element 610, is arranged as the first section of the package.

The notifier 610 can take the form of one or more data objects or an executable object, depending on the type of package. Where the package contains data objects in the form of media objects such as digital images, video data or audio data produced in a standard format, the notifier includes at least one unencrypted and uncompressed image to be displayed to the user, as needed. As will be explained in greater detail below, packages having data objects in standard formats preferably are accessed in the user's system by means of a driver executable in accordance with one aspect of the present invention. The first (or only) image stored in the notifier provides a message to the user that he needs to download the driver executable in order to make use of the data object in the package. The notifier can

also include a version of an object in the package having less information than such object, but which is unencrypted and readily displayed by the user's system. Once the driver executable has been downloaded and installed, it presents a dialog box to the user indicating the available object, their authorized usages, and the prices of each.

The driver executable is able to detect the type of accessed package as one including data objects requiring access control by the driver executable based on the package's signature which, in the embodiment of Figure 6, is appended at the end of the package. Where the driver executable detects that the accessed package has no recognizable signature or instead includes executable objects, it simply passes such packages on to the operating system without exercising any form of access control.

Packages including executable objects have notifiers including executables which serve both to control access to the executable objects in the package and to display necessary images to the user. These functions of the notifier executables will be described in greater detail below. Since the driver executable is only required for accessing packages having data objects, there is no need to include a signature in a package heaving only executable objects.

Figure 7 illustrates another method for producing a software package including data or executable objects. In a first step 710 of the Figure 7 method, it is assumed that first, second and third objects, as well as an appropriate notifier and usage authorization information have been provided. In step 710, a watermark is placed in each of the foregoing objects, notifier and usage authorization information to provide a means of identifying the licensed user if any of these should be redistributed by him without authorization.

Data objects may be watermarked by any of a number of known methods which add data to the objects or modify the original data in order to embed the data of the watermark. However, watermarking of executable objects has, until now, been impractical, since any change to the code in the objects will interfere with the proper operation of the executable, and will likely render it inoperable. In addition, it is necessary for any such watermarking methodology for executable objects to enable the production of many variations in the watermark (at least one for each user) and,

thus, in the anatomy of the executable, but wherein each variation of the executable is semantically equivalent to all other variations.

5 A further requirement is resistance to collusion attacks in which two or more dishonest purchasers combine their versions of the executable to derive one copy from which the watermark has been eliminated. To be considered resistant to such attacks, the number of different buyers whose individual revisions are all required to produce a watermark-free version or a version in which the watermark is useless, should be made impractically large.

10 In a further aspect of the present invention, watermarks are embedded in executable objects so that the watermarks are highly resistant to collusion attacks.

15 Advantageous watermarking techniques in accordance with certain features of the invention are illustrated in Figures 8A through 8D. In general, the method comprises: determining a location of at least one padding area in an executable object, and inserting a predetermined watermark in the at least one padding area. In certain embodiments, the watermark is encoded. A particularly advantageous form of encoding the watermark comprises including a plurality of software portions copied from the executable object or which mimic the same in the padding area to represent the encoded watermark.

20 Examples of padding areas are provided with reference to Figures 8A and 8B. Figure 8A schematically illustrates a portion of an executable object in a storage medium, the object including a header 810, an executable code section, 820 and a data section 830. The executable object of Figure 8A is formatted so that each section begins at a predetermined boundary. For example, the formats of an executable in the Win 32 platform would align the beginnings of the sections 820 and 830 at a 4 Kbyte boundary. Similar alignment conventions have been devised for other software formats, such as Common Object File format (COFF) used in UNIX and the Portable Executable format (PE) which is an extension of the COFF utilized in Windows™ platforms. The technique of aligning the beginning of each section at a predetermined boundary is convenient for programming purposes.

30 As a result, padding areas 812, 822, 832 are formed between the ends of the sections 810, 820, and 830 respectively, and the following boundaries.

The padding areas either contain code or data which is unimportant or are simply empty.

- 5 Padding areas also exist within sections. With reference to Figure 8B, a schematic diagram of a code sections is illustrated having instructions 1, 2, 3 ..., n, (n+1), ...

10 In this example padding areas are located after instruction 10 as well as after instruction (n+1). Such padding areas may be produced, for example, by a compiler which is designed so that each routine or calling point is arranged according to cache-line size. Codes designed to run on Intel™ processors include sequence of opcodes 0 x 90 (NOP) in these padding areas, so that it is relatively easy to locate such areas.

- 15 There are a number of ways to include watermarks in the padding areas as shown in Figures 8A and 8B. In certain embodiments, the watermark data is inserted in the padding areas in an unencoded form. Less knowledgeable users and licensees are not likely to take steps to locate and remove such watermarks. However, in more secure embodiments, the watermark is generated as a random number or selected as a pseudorandom number so that it is not easily recognized in order to remove or alter it.

20 However, padding areas associated with executable code sections or routines normally are filled with code which is not to be executed but rather serves only as filler. To substitute a random number for such codes would likely arouse suspicion by a would-be software pirate. Accordingly, in particularly advantageous embodiments, the watermark is encoded in software which mimics software present in the object before the watermark is inserted. An efficient way to carry out this method is to copy portions of the pre-existing software (code or data) to represent the watermark. In
30 certain embodiments, the copied code is modified to encode the watermark. Preferably, however, the copied portions are unmodified, but rather are selected to replace the existing contents of the padding area in a sequence representing the watermark. This is carried out in certain embodiments by selecting the copied portions according to their parities, so that a predetermined watermark can be
35 recovered from the watermarked object simply by calculating the parities of the

objects' contents until a known random or pseudo-random number constituting a predetermined watermark is found.

Examples of this encoding technique are illustrated in Figures 8C and 8D. Figure 8C illustrates a technique for inserting watermarks in the padding areas 822 and 832 in the executable of Figure 8A. Once the padding areas 822 and 832 have been located, their contents are substituted with software from the adjacent segments 820 and 832 to encode the watermark. In order to encode the watermark, in padding area 822, the parities of various code blocks from the code section 820 are determined. Then the blocks are inserted in the padding area 822 based on their parities, so that when the parities of these blocks are later determined, they reveal the watermark, preferably a random-generated or pseudorandom number.

As an example, if the watermark to be inserted in area 822 is 1011, a block 823 is selected having a parity of "1" and is inserted in area 822. Then a block 824 having a parity of "0" is inserted in the area 822, followed in turn by blocks 825 and 826 having parities "1" and "1," respectively. Similarly, blocks 833, 834, 835, and 836 are inserted in area 832 to continue the watermark.

Figure 8D provides an example of a method for encoding a watermark in the padding areas between routines in a code section of the type illustrated in Figure 8B. Routines 0, 1 and 2, also identified by reference numerals 850, 860, and 870, are separated by padding areas 852, 862, and 872. The watermark is inserted in the identified padding areas 852, 862, and 872 by copying portions of the sections 850, 860 and 870 and inserting these in the padding areas. In the example of Figure 8D, an initial portion of routine 0 is inserted in a first portion of padding area 852 and a concluding portion of routine 1 is inserted in a final portion of padding area 852. Similar selections and insertions are made in padding areas 862 and 872. In this example, the watermark is encoded in the selection of the portions of the routines inserted in the various padding areas.

Various other encoding techniques are available. In other embodiments, NOP opcodes are replaced by opcodes having the same effect, just in case the NOP's are actually executed. For example, opcodes such as [mov al, al], [mov cl, cl] [mov ah, ah] and [fnop] have the same effect as an NOP opcode and may be substituted therefore in order to encode a watermark.

In still other embodiments, the lengths of the blocks and/or fake routines are selected to encode all or part of the watermark.

- 5 In a subsequent step 720 of the method as illustrated in Figure 7, the first, second, and third objects are compressed in accordance with still another aspect of the present invention. In a third step 730 of the method as shown in Figure 7, each of the blocks and assembly information representing the compressed first, second, and third objects, as well as the Usage Authorization Information is encrypted.
- 10 Preferably, each is encrypted using a respective unique key. The keys are not included in the resulting software package, but are retained to be distributed subsequently to authorized users.

15 The inventive compression technique carried out in step 720 of Figure 7, as well as the encryption step 730 thereof, are illustrated in greater detail in Figure 9A. As shown therein, software objects 1 through n, identified by 910, which may take the form of separate software packages, are subject to an inventive macrocompression method 920 to convert the objects 1 – n into one or more blocks 937 and assembly information objects 935, one for each object 1 – n, each indicating how to reconstruct

20 the various strings of the respective one of the objects 1 – n from the one or more blocks 937. In summary, the macrocompression method 920, (1) produces matches of reference strings within the software objects 910 with comparison strings therein, the reference strings and the comparison strings having a predetermined minimum length, each comparison string within the same package as a matching reference string being separated therefrom by a predetermined minimum distance

25 with the package, (2) expands the sizes of matching strings by including adjacent, matching software therein, and (3) forms compressed software objects comprising at least one software block corresponding to a selected one of the expanded, matching strings and assembly information indicating how to reconstruct others of the

30 matching strings from the at least one software block. In certain embodiments, the software objects 910 comprise data. In other embodiments, the software objects 910 comprise executables. While Figure 9A shows multiple objects 1 – n, the macrocompression method 920 also serves to compress a single object in certain

35

The macrocompression method 920 is illustrated in greater detail in Figure 9B. String matching is carried out on the contents of the 1 through n objects 910, as indicated in a step 932. In certain embodiments, the string matching step is facilitated by producing a hash head table grouping possible string matches together according to their hashing functions.

A hashing function of a given string calculates a hashing value based on the values of the bytes in the string. In certain embodiments of the present invention, a minimum string length of n bytes is employed and a hashing function is selected to calculate a hashing value for each string of n bytes. In general, the hashing value for each string of n bytes in each of the objects to be compressed is carried out, although this is not essential. In the general case, the hashing function is carried out for each string in the object $[p_0, p_1, \dots, p_{n-1}]$, $[p_1, p_2, \dots, p_n]$, $[p_i, p_{i+1}, p_{i+n-1}]$, etc., where p_i represents a value of the i^{th} byte in the object. As the hashing value of each string having an offset j is determined, its offset j is added to a hash head table, indexed according to its hash value.

An exemplary hash head table is illustrated in Figure 9C and stores data identifying each string of n bytes in three objects M_1 , M_2 and M_3 indexed according to the hashing value of each string. As shown in Figure 9C, all strings having a hashing value h equal to zero are identified by offset and object numbers in the initial record of the hash head table, and so on, until a final record is provided to identify those strings whose hashing value is a maximum among all hashing values in this case, h_{max} . It will be appreciated that the maximum possible number of different hashing values in this case will be $(L_{1-n}) + (L_{2-n}) + (L_{3-n})$ which will occur in the event that each string yields a different hashing value. Accordingly, this is the maximum possible length of the hash head table for which memory space need be set aside in memory 140.

A particularly advantageous hashing function calculates the hashing value of each string of n bytes as a summation of their values:

$$h(j) = \sum_{i=j}^{j+n-1} p_i ,$$

wherein $h(j)$ represents the hashing value of the j^{th} string in the object and p_i is the value of the i^{th} byte of the object. One advantage flows from the commutative property of this function. That is, the function is commutative since it may be carried

out using the byte value p_i in any arbitrary order. Consequently, in certain advantageous embodiments, once the hash value $h(j)$ has been calculated as above for the string $(p_j, p_{j+1}, \dots, p_{j+n-1})$, the hashing value for the next string is determined using relatively fewer operations (and processing time) as follows:

$$H_{(j+1)} = h_{(j)} - p_j + p_{j+n}.$$

Also, the contents of most objects yield hashing values which are clumped, that is, unevenly distributed over the range of hashing values. This tends to reduce the usefulness of the hashing function as a means of separating strings which do not match from those which possibly do match. Where the invention implements a hashing function of the type:

$$h(j) = \sum_{i=j}^{j+n-1} p_i,$$

in certain embodiments utilizing this function, clumping is reduced by increasing the range of hashing values. That is, where the hashing function is carried out in the form illustrated above for the strings of length n bytes in an object having a total of L bytes, the maximum number of different hashing values is $(L-n)$. In the presently described embodiments, the hashing function is modified so that it takes the form:

$$h = K_1 h_1 (\text{bytes } a) + K_2 h_2 (\text{bytes } n-a),$$

wherein (bytes a) are the first (a) bytes within the string, so that $a < n$; (bytes $n - a$) represents the following ($n - a$) bytes within the same string; a selected one of K_1 and K_2 is equal to 1 and the other of K_1 and K_2 is an integer greater than 1; the function h_1 is calculated: $h_1 = \sum (\text{bytes } a)$; and the function h_2 is calculated:

$$h_2 = \sum (\text{bytes } n - a).$$

In a particularly advantageous form of this embodiment, memory space is conserved by assigning the value $(255a+1)$ to the other of K_1 and K_2 , so that the maximum value of h_1 , which is $(255a)$, immediately precedes the minimum non-zero value of K_2 , which is $(255a+1)$. As a consequence, there is no wasted memory space between these two possible hashing values.

Still other types of hashing functions may be employed in place of the above-described summation function. In particular, other commutative hashing functions are similarly advantageous. For example, an appropriate commutative hashing function h can take the form:

$$h(j) = p_j \times p_{j+1} \times \dots \times p_{j+n-1},$$

or the form:

$$h(j) = p_j \oplus p_{j+1} \oplus \dots \oplus p_{j+n-1}.$$

Since these functions are commutative, they can also be implemented in a simplified fashion as:

5
$$H(j+1) = h(j) \text{ (inv_op) } p_j \text{ (op) } P_{j+n},$$

Where (op) represents a selected commutative operation (such as addition, multiplication, or exclusive OR) and (inv_op) represents the inverse of such operation.

- 10 As noted above, the hash head table produces records containing possible matches. So, once that table is produced, the string matching process continues by searching for matches within each record of the table on the condition that, to qualify as an acceptable match, two matching strings within the same package (such as strings from the same file) must be separated by a predetermined minimum
- 15 distance within the package. The following Table One provides an example of a possible sequence by byte values within a given package wherein each row of byte values is a continuation of the preceding row of values:

TABLE ONE

20 Column

	1	2	3	4	5	6	7	8	9
Row 1	3	2	5	1	7	9	10	5	7
Row 2	10	11	31	2	5	1	7	9	10
Row 3	9	21	24	0	0	0	0	X ₁	X ₂
...									
Row k	X _N	2	5	1	7	9	Y ₁	Y ₂	Y ₃

From Table One it will be seen that four different strings of five bytes each have the hashing value $h(j) = 24$, where

25
$$h(j) = \sum_{i=j}^{j+4} p_i,$$

namely, (a) the string (a) from row 1, column 2, to row 1, column 6 having the values (2,5,1,7,9), (b) the string (b) from row 2, column 4 to row 2, column 8 having the values (2,5,1,7,9), (c) the string (c) from row 3, column 3 to row 3 column 7 having the values (24,0,0,0,0), and the string (d) from row k, column 2 to row k, column 6 having the values (2,5,1,7,9). While strings (a) and (c) have the same hashing values, they clearly do not match. Also, since to qualify as an acceptable match, the matching strings must be separated at least by a minimum distance if within the same package, string (a) and (b), while matching, will not qualify if the minimum distance exceeds 11 bytes. Typically, the minimum distance will be substantially greater than 11 bytes in order to provide the ability to compress further through microcompression, as explained in greater detail below. If it is assumed that the matching strings (a) and (d) are separated at least by such minimum distance, therefore, strings (a) and (d) form a qualifying match.

An example of a search for matching strings in multiple packages is now provided with reference to Figure 9C. Packages M_1 , M_2 and M_3 are illustrated therein having two types of exemplary strings of length n bytes, strings A and B. Where matching strings are contained in different packages, as in the case of strings B in packages M_1 and M_3 , there is no need to require a minimum distance between them, as they would not be matched in the subsequent microcompression process. However, if it is assumed that the minimum distance between strings is q bytes as shown in Figure 9C, then the two strings A in M_1 will not form a qualifying match, as they are offset by less than q bytes. However, the two strings A in M_2 will form a qualifying match as the strings of this pair are separated by within package M_2 by more than q bytes.

Once all of the qualifying matches of a given type of string have been found, their identifiers are collected under a common group designation. When all of the qualifying matches of each type of string in the package or package being compressed, have been found and so grouped, the sizes of the matching strings are expanded by including adjacent matching bytes therein. An exemplary string expansion technique is explained in connection with Figure 9D which is a schematic illustration of a portion of a package or object having various types of strings K, L, P, and Q, in which the matching process has located three qualified matching strings 1, 2, and 3 of type K. In order to expand these strings in one embodiment, each of the strings 1, 2 and 3 is expanded to the right by one byte and then the various combinations of matching string pairs (1 and 2, 2 and 3, 1 and 3) are compared for a

match. If a match is still found for a given pair, the strings of the matching pair are repeatedly expanded by one byte and compared until a match is no longer found. At that point the identity of the pair and its matching length is entered in a table of the various string pair combinations, as shown in Figure 9E.

5

In other embodiments, the matching strings of each group instead are expanded to the left, while in still other embodiments, the matching strings are expanded in both directions.

10 Once the expanded matching pairs have been entered in the table of Figure 9E, they are removed from the hash head table.

When all of the matching strings have been expanded as explained above, the software blocks and the assembly information constituting the compressed package or packages are produced in a step 935 of Figure 9B. Preferably, representative ones of the largest expanded, matching strings are selected as the software blocks, represented schematically at 937 in Figure 9B, and copied as indicated in step 939. Then the assembly information is produced as information referencing the remaining strings to all or a portion of each of the software blocks, as their contents correspond.

20 This step is illustrated by the example of Figures 9D through 9F. As described above, in this example, the matches for each pair of strings (1, 2), (1, 3) and (2, 3) as seen in Figure 9D were separately expanded to produce the data shown in the table of Figure 9E. From Figure 9E it will be seen that the largest expanded, matching strings are strings 2 and 3. In this example, string 2 is selected as a

25 software block for reference in reproducing each of the expanded strings 1,2,and 3, since the contents of each is either contained in or corresponds to the contents of expanded string 2. The assembly information necessary to reconstruct strings 1,2, and 3 is arranged in the table in Figure 9F. For example, string 1 is identified by its offset in the original package or object and its contents are reproduced from string 2

30 (software block) as the source, based on the offset within string 2 at which its contents are located (the source offset) and the length of such contents within string 2. In this manner, relatively large blocks of data from the original uncompressed package or object can be represented as only a few bytes within the assembly information in the compressed form thereof, resulting in substantial reductions in the

35 amount of data required to represent the package or object when it has been compressed according to the macrocompression method of step 920.

Where it is desired to remove information from a given package, for example, in order to produce images such as those illustrated by Figures 3E and 3K, or a sound segment such as that shown in Figure 4B, a technique as illustrated in Figures 9G and 9H is advantageous. In Figure 9G, it is assumed that a segment B is to be removed from a package P and substituted with zero values throughout, or else by some other constant or by noise. As shown in Figure 9G, the segment B is located at an offset 2 and has a length L_B . Segment B is flanked by a segment A located at an offset 1 and a segment C located at an offset 3.

The desired result is illustrated in Figure 9H wherein the segment B is replaced by zero-value data, represented by double cross-hatching. The resulting package P' is achieved by specifying the source for each of the three segments, as shown in the table T of Figure 9H, wherein the source for the segment at offset 2 extending for a length L_B is specified as the constant value zero, which thus replaces the original contents of segment B.

Once the new package P' has thus been specified, macrocompression is carried out only for the first and third segments of offsets 1 and 3. This is achieved preferably by constructing a hash head table only for the strings in the first and third segments A and C, and prohibiting the use of any strings in the second segment in producing the hash head table. Thereafter, both the macrocompressed segments at offsets 1 and 3 and the uncompressed segment at offset 2, may be compressed by microcompression as discussed below.

This technique is useful not only in producing degraded objects and packages, but also for preparing a partially compressed package or object having an uncompressed portion which is thus readily modified.

Returning to Figure 9A, after the macrocompression method 920 has been carried out, the resulting blocks and assembly information are further compressed by microcompression, as indicated by step 950. As used herein, microcompression identifies a software compression technique which compares strings having a predetermined maximum size with other strings of the same size which are located no more than a predetermined maximum size with other strings of the same size which are located no more than a predetermined distance or window from one

another in the same package, in order to eliminate redundant strings. An example of a microcompression executable is the PK Zip™ utility. The result of microcompression is further compressed assembly information AI* and software blocks BLKS* as shown in Figure 9A.

5

Preferably, the window used in the microcompression process is smaller than the minimum distance between qualified matching blocks in the macrocompression method of step 920. In this manner, different strings are compared in the two compression techniques, thus affording a more effective compression. In accordance with another aspect of the invention, a method of compressing software in one or more packages comprises: producing first compressed software by matching strings selected so that matching strings within the same package are separated at least by a minimum predetermined distance within the package, and producing second compressed software by matching strings of the first compressed software within the same package and within a maximum predetermined distance of one another. Preferably, the minimum predetermined distance is greater than the maximum predetermined distance.

10

15

20

25

The further compressed assembly information AI* and software block BLKS*, along with the Usage Authorization Information, are then encrypted in a step 960 so that the Usage Authorization Information and the assembly information AI* for each object 1 through n, is encrypted with a respectively different encryption key. Preferably each of the blocks BLKS* is also encrypted with a respectively different encryption key. As will be explained in greater detail below, each encryption key is produced based on the information characteristic of the user's computer system, and so that decryption requires the use of both the encryption such characteristic information. This ensures that the encrypted information and software cannot be decrypted using a system other than the user's particular system.

30

35

In accordance with a still further aspect of the invention, a method of encrypting software representing a plurality of compressed objects is provided. The software includes at least one software block and assembly information for each of the objects, the assembly information for each object enabling the reconstruction thereof from the at least one software block. The method comprises: encrypting each of the software blocks with an encryption key; and encrypting the assembly information for

each object using a respectively different encryption key. Preferably, a respectively different encryption key is used to encrypt each of the software blocks.

The encrypted assembly information AI** and the encrypted software blocks BLKS
5 ** together with the encrypted Usage Authorization Information, are formed into a single composite package 970.

In a final step 740 of the method as shown in Figure 7, an appropriate notifier and
signature (if necessary) are added to the encrypted blocks, assembly information
10 and usage authorization to complete the package.

An advantageous format for the software package is illustrated in Figure 10, wherein
the notifier 1010 is placed at the head of the package. Where the package includes
data objects, placing the notifier at the head of the package will result in the display of
15 the correct image when the package is first accessed. Where the package includes
executable objects, the first portion of the package may simply be a header
indicating the entry point for an executable notifier located anywhere in the package.
Packages including data objects have a signature 1020 appended thereto. Placing
the signature at the end of the package enables the executable driver to readily
20 locate the signature in order to determine if it is to exercise access control over data
objects in the package as well as perform other functions such as decryption and
decompression of data objects. Although the signature 1020 is shown appended at
the end of the package, in the alternative, it may be located elsewhere, such as at
the beginning of the package or after the notifier.

Between the notifier 1010 and the signature 1020, the encrypted sections 1030
(indicated by cross-hatching) are arranged in a predetermined order to be accessed
by the driver executable or the executable notifier, as the case may be.

Figures 11A through 11C illustrate the structure of a software package including
multiple program objects. Figure 11A provides an overall view of the software
package illustrating the arrangement of an executable notifier 1110 at the head of the
package, an optional signature section 1120 at the end of the package, with
encrypted and compressed program objects 1 and 2 and encrypted access control
35 information 1130 arranged between the executable notifier 1110 and the signature
section 1120.

The executable notifier 1110 is illustrated in greater detail in Figure 11B. As shown therein, the executable notifier 1110 includes a header section 1135 at the beginning of the software package, followed in turn by an executable code section 1140 and a data section 1145. The data section 1145 is followed sequentially by a resource section 1150 and an import table 1155. The resource section 1150 supplies various resources which may be employed by the executable code of section 1140, such as dialog boxes or menus. The import table 1155 includes links to various routines supplied by the operating system, such as print, copy, readfile, createfile, etc.

Figure 11C illustrates the encrypted portions of the software package, including the encrypted access control information 1160 and the compressed program objects in the form of N blocks 1165 and respective assembly information sections 1170 for each program object.

With reference to Figure 11B, the executable code section 1140 of the executable notifier 1110, in general, exercises control over access to the program objects 1 and 2 and performs certain ancillary functions, as follows:

(1) When the user's system first loads the software package in memory, the executable code section 1140 runs a setup routine utilizing displays and dialog boxes supplied from the resource section 1150. The setup routine performs normal setup functions, such as a display of the relevant user license and securing the user's agreement to the license terms.

(2) The executable code section 1140 solicits and evaluates the user's requests for access to the program objects. This is achieved by displaying a dialog box when the software package is accessed by the user. The dialog box explains the user's options such as which programs and/or program options are available without charge, which are available for a fee, and which of the latter have been purchased and are still available to be used. To provide such a display, the executable code section references both the access control information 1160 (after decrypting section 1160) and a purchase status file which is produced when the user purchases rights to use one or more objects.

(3) Where a requested use is either free or already purchased, if not free, the executable code section 1140 decrypts and decompresses the relevant program or data object, and then loads it in memory to be run so that the requested use may be carried out. The section 940 prevents access to unavailable uses by hooking the functions referenced in the import table of the running program object to control routines in the executable code section 1140 as explained below.

(4) The executable code section 1140 serves to deter dump attacks by erasing from memory certain necessary information from the program object when it loads the program object in running format in memory. Consequently, even if the decrypted and decompressed program object is somehow copied from the memory to some storage device, it could not be reloaded in running format in memory and thus, is useless after a dump attack.

It will be understood that the executable code section 1140 functions as a "wrapper" or access control executable but without being susceptible to various types of attacks that prior art wrappers have been subject to.

Figure 12 is a flow diagram of a method for secure distribution of software by data communication. For the purposes of Figure 12, it will be assumed that a user's computer has been connected to a server computer by a data communication channel, such as the Internet. According to an initial step 1210 in Figure 12, the server sends a software product, which is either an executable object or a data object to the user's computer, in response to a request sent to the server from the user's computer.

If the software product is a data object, the user's computer will require a driver executable in order to make use of the data. If the user's computer lacks the required driver executable, the user's attempt to access the data object will result only in the display of a notification to download the driver executable from the server computer. When the server computer receives such a request, it responds as indicated in step 1220 by sending the driver executable to the user's computer, where it is installed to operate between its operating system and the appropriate disk or other mass storage driver thereof, as explained below in connection with Figure 14.

Then at step 1230, and in response to input from the user, an access control executable portion of the software product (if an executable) or of the driver executable (if the software product is a data object) causes the user's computer to transmit a purchase request for partial or full access to the software product, and the server receives the purchase request. Step 1240 follows, at which the server sends to the user's computer a program which generates system identification information based on data that is specific to the user's computer. For example, the data used to generate the system identification information may include serial numbers of such components of the user's computer as the hard disk, the network interface card, the motherboard, and so forth. The user's computer then sends to the server the resulting system identification information as well as information, such as a credit card number, which is required to complete the transaction. This information is received at the server, as indicated at step 1250.

Following step 1250 is step 1260, at which the server validates the credit card information and generates a decryption key and or a decryption executable program on the basis of the system identification information received from, and specific to, the user's computer. According to one method of implementing the invention, the required decryption key is split into two parts, of which one part is calculated in the server, and the other is calculated in real time in the user's computer, using the data which is specific to components of the user's computer. The decryption key and/or decryption executable program are then transmitted to the user's computer from the server, as indicated at step 1270. The decryption key and/or decryption executable program are then used in the user's computer to decrypt the software object to which the user has just purchased rights. In certain embodiments, a watermark is added to the software object to store data indicative of the transaction in which the usage rights were purchased.

According to certain embodiments of the invention, the software product sent at step 1210 includes three objects, of which a first object has all of the features of a second object plus at least one additional feature. A third of the three objects has all of the features of the first object plus at least one additional object. Access to the second object is free, but access to the first and third objects requires two separate payments. If a payment arrangement is made for both of the first and third objects, the server computer provides different access control codes, such as different encryption keys, for the first and third objects, respectively. The different control

codes are based on different respective information characteristic of the user's computer system.

Figure 13 is a flow diagram of a method for secure distribution of software stored in a storage medium.

According to a first step 1310 in Figure 13, software which is distributed on a storage medium is acquired by the user of a computer and installed on the user's computer. This step 1310 may have taken place a substantial period of time prior to the subsequent steps. Next, at step 1320, a server computer receives a request from the user's computer to purchase partial or full access to a software object which was installed on the user's computer in step 1310. It again is assumed that the user's computer has been connected by a communication channel to the server. Preferably, the information received by the server at step 1320 includes an identification code (such as a CD serial number) which identifies the particular storage medium on which the software was distributed.

Following step 1320 are steps 1330, 1340, 1350 and 1360. These steps may be identical to steps 1240 – 1270 which were described above in connection with Figure 12, except that the decryption key generated by the server at step 1350 may be based in part on the storage medium identification code. In view of the corresponding steps in Figure 12, no further explanation of Figure 13 is necessary.

Figure 14 is a schematic diagram illustrating the use of a driver executable controlling access to data objects stored in a computer system. The software architecture illustrated in Figure 14 includes a media player application 1405 which is provided to read or play data objects such as images. Also included, is a conventional operating system 1410 and a driver executable program 1415 of the type referred to in connection with step 1220 in Figure 12, or which is distributed on the storage medium referred to at step 310 in Figure 13.

Also illustrated in Figure 14 are a conventional driver program 1420 which is provided for managing a storage device, and a storage device 1425 on which one or more data objects are stored.

Figure 14 also illustrates a process by which a data object stored on the storage device 1425 is accessed by the media player application 1405, as well as a process for requesting printing of the accessed object.

5 When the user of the computer system enters an input to request access to a data object stored on the storage device 1425, a request to that effect is passed from the media player application 1405 to the operating system 1410, as indicated at reference numeral 1430 in Figure 14. In response to the request 1430, the operating system 1410 passes a second request (represented by reference numeral 1432)
10 to the driver executable 1415. In response to the request 1432, the driver executable 1415 passes a third request (reference numeral 1434) to the storage device driver 1420. In response to the request 1434, the storage device driver 1420 retrieves the desired data object from the storage device 1425. the desired object is then passed from the storage device driver 1420 to the driver executable
15 1415 either in encrypted form, as indicated at 1436, or in unencrypted form. If the user has satisfied the condition for access to the data object (e.g. by paying the purchase price for access), then the driver executable decrypts the encrypted data object and passes the decrypted data object to the operating system 1410, as indicated at 1438. The decrypted data object is then passed from the operating
20 system to the media player application, as indicated at 1440.

If the user wishes to print the data object, then a request 1442 is passed from the media player application to the driver executable, which then passes another print request 1444 to the operating system.

25 Figure 15 is a flow diagram which shows additional details of a method of printing a data object to which access is controlled. In response to input from the user of the computer, the media player transmits the print request (reference numeral 1442 in Figure 14), as represented by step 1510 in Figure 15, to the driver executable. The
30 driver executable then examines the object to determine whether identifier data such as a signature is present in the object to indicate that printing of the object is subject to some restriction (step 1520). If at step 1520 no such identifier is found, then, as indicated at step 1520, the driver executable provides the data object in an
35 unmodified form to the operating system.

If at step 1520, the driver executable finds the signature which identifies the object as one for which access is controlled, step 1540 follows. At step 1540, the driver executable saves or modifies the target address in the media player application to which the application directs calls for a print routine. Consequently, as indicated at
5 step 1550, when the media player calls a print routine, the call is directed to the driver executable. However, if step 1450 has already been carried out as a result of a previous print request from the media player, this step need not be repeated.

At step 1560, and in response to the call for the print routine from the media player
10 application, the driver executable determines whether the customer has satisfied the condition required to authorize printing of the data object. If not, the driver executable causes the computer to display a suitable notice to indicate to the user that printing is denied, and to invite the user to purchase the right to purchase the data object (step 1570), as described hereinabove.

15 If at step 1560 the driver executable determines that printing is authorized, then the driver executable calls the print routine provided by the operating system (step 1580).

20 Figure 16 illustrates the software package of Figure 11A – 11C when the software package is first loaded into the working memory of a user's computer system. As before, the executable notifier 1110 is made up of a header section 1135, followed in turn by an executable code section 1140, a data section 1145, a resource section 1150, and an import table 1155.

25 Following the executable notifier 1110 are the encrypted and compressed program objects and encrypted access control information, all indicated by reference numeral 1130, and the signature section 1120, which were referred to above in connection with Figure 11A.

30 If the user requests access to one of the program objects, say object 1, and if access to the object has been authorized, then the executable notifier decrypts and decompresses the program object and causes the program object to be written in executable form as indicated in Figure 17. As seen from Figure 17, the decrypted,
35 decompressed program object includes a header section 1710 followed in turn by

an executable code section 1720, a data section 1730, a resource section 1740 and an import table 1750.

After the program object has been written in memory in executable form as shown in Figure 17, the executable notifier modifies the program object in a manner to defeat dump attacks. This is achieved by erasing or modifying certain portions of the program object after it is written in memory. In certain embodiments, one or more of the program object's relocation information, directory pointers, or its entry point are erased or modified for this purpose. In other embodiments, one or more of the references to exterior routines in the import table of the program object are modified to enable the executable notifier to control access to such routines. This modification of the program object is referred to as "hooking" routine calls by the program objects. This is done by modifying the import table 1750 so that routine calls are routed through the executable notifier instead of directly to the operating system. Details of the "hooking" process will now be described with reference to Figure 18.

As indicated at 1810 in Figure 18, the executable notifier erases portions of the import table that identify the routines to be called by the corresponding virtual address such as "read file", "create file", or "print". Instead of addresses to the operating system routines, the executable notifier inserts virtual addresses in the import table which cause jumps to the code section 1140 of the executable notifier. The code section 1140 is programmed to interpret each jump to determine the particular routine requested by a program object. The executable notifier then determines whether the user has satisfied the conditions to perform the function in question. If so, the executable notifier calls the appropriate routine in the operating system. To elaborate details of the "hooking" process shown in Figure 18, the executable notifier stores in an address record portion of the import table 1750 addresses within the executable notifier in place of the addresses of the relevant routines in the operating system. Instead of erasing part or, and making substitutions for, the import table 1750 of the program object, the executable notifier may erase and substitute for other portions of the program object, such as relocation information, a directory pointer or an entry point pointer.

The above description of the invention is intended to be illustrative and not limiting.

Various changes or modifications in the embodiments described may occur to those

skilled in the art. These can be made without departing form the spirit or scope of the invention.

CLAIMS

1. A method of evaluating software by a user for subsequent purchase
5 comprising the steps of:

acquiring a software package, said software package comprising:

a first object, said first object a full-featured version of at least one software
product, wherein said user is denied access to said first object;

10 a second object, said second object a further version of said software product
having some, but less than all, of the features of said first object;

an access and control portion, said access and control portion affording
selective access to any of said first and second objects; and

a notifier;

15 installing said software package on said buyer's computer system, wherein
said installation comprises running a setup routine;

accessing said second object, access to said second object being
unrestricted; and

evaluating said second object whereby said user assesses whether said
software product meets said user's requirements.

20 2. The method of Claim 1, wherein said access and control portion includes
usage authorization information.

25 3. The method of Claim 1, wherein said acquiring step comprises any of the
steps of:

acquiring said software package as a software copy on a recordable medium;

acquiring said software package via data communication from any of an
Internet site and a dial-up online service.

30 4. The method of Claim 3, said acquiring step further comprising the step of
saving said software package to a mass storage device in said user's computer.

5. The method of Claim 4, wherein said mass storage device comprises a hard
disk drive.

6. The method of Claim 2, wherein said first object and said usage authorization information are encrypted, whereby said user is prevented from accessing and using said first object and said usage authorization information until said prospective user executes a purchase request, thereby acquiring a license to at least some of the rights to said software product.

7. The method of Claim 6, wherein said first object, said second object and said usage authorization information are macro-compressed and optionally, micro-compressed.

8. The method of Claim 6, wherein said usage authorization information specifies any of:

permitted uses for said software product and individual components thereof and prices for said permitted uses;

authorized extent of use, where said extent of use comprises any of duration of use and number of uses, and prices for said authorized extent of use;

content of levels, where said software is purchased in succeeding levels, and prices for said levels;

an authorized user for said software product subsequent to purchase; and subsequent to purchase, which of said individual components and levels have been purchased, and which are still available for purchase.

9. The method of Claim 8, wherein said software product comprises one or more executable objects.

10. The method of Claim 9, wherein said executable objects comprise any of application software, utilities, and computer games.

11. The method of Claim 8, wherein said software product comprises one or more data objects.

12. The method of Claim 11, wherein said data objects comprise any of digital images, video data objects and audio data objects.

13. The method of Claim 9 wherein said levels comprise versions of said executable objects having more features enabled than a version in a preceding increment.

5 14. The method of Claim 9, wherein said increments comprise additional objects over those in a preceding increment.

15. The method of Claim 11, wherein said increments comprise additional objects over those in a preceding increment.

10

16. The method of Claim 9, wherein said notifier comprises:
an executable code section; and
information required by said user for purchasing rights to said software product and enabling entry of transaction information required for said purchase of
15 said rights.

17. The method of Claim 16, wherein said installing step comprises the steps of:
loading said software package into the memory of said user's computer system;

20

running a setup routine, wherein said executable code section performs normal setup functions, including displaying a user license;
agreeing to terms of said user license.

18. The method of Claim 16, wherein said evaluating step comprises the steps of:

25

selecting one or more use options from a listing of said use options available, said available options being those objects available free of charge or those previously purchased by said user, said listing being provided by said executable code section accessing said usage authorization information, and wherein one or
30 more of said available objects are retrieved by said executable code section and loaded into memory; and

executing said requested use.

19. The method of Claim 18, further comprising the step of:

35

purchasing any of said software product in entirety and one or more parts thereof.

20. The method of Claim 19, wherein said purchasing step comprises the steps of:

providing user information;

optionally, electing usage levels and desired features;

providing payment information;

transmitting a purchase request to a server, said purchase request comprising said payment information and said desired usage information.

21. The method of Claim 20, wherein said payment information comprises credit card information and contact information for said prospective purchaser.

22. The method of Claim 21, wherein selected information characteristic of said user's computer system is transmitted to said server after said purchase request is received by said server

23. The method of Claim 22, wherein said selected information includes serial numbers from any of a hard disk drive, a network interface card, and a mother board from said user's computer.

24. The method of Claim 23, wherein said selected information includes an identification code identifying a particular storage medium on which said software package was distributed.

25. The method of Claim 22, wherein said server transmits an access control code to said user's computer after said purchase request is successfully processed, said access control code based on said selected information characteristic of said user's computer, and wherein said access control code is separately stored on said user's computer from said software package.

26. The method of Claim 25, wherein said access control code is a decryption key for said encrypted first object, said decryption key based on said selected information, and wherein both said decryption key and said selected information must be present on said user's computer in order to decrypt said first object.

27. The method of Claim 26, wherein said decryption key is split into two parts, a first part of which is calculated on said server, and a second part of which is calculated in real time on said user's computer using said selected information.

5 28. The method of Claim 25, wherein said access control code is a decryption executable for said encrypted first object, said decryption executable based on said selected information, and wherein both said decryption executable and said selected information must be present on said user's computer in order to decrypt said first software version.

10

29. The method of Claim 11, wherein said access control portion further comprises a signature, said signature being readable by a predetermined executable serving to control access to said first object.

15

30. The method of Claim 29, wherein said predetermined executable is a driver executable, wherein said driver executable is downloaded from a server by said user; and wherein said driver executable is installed on said user's computer separately from said software package.

20

31. The method of Claim 30, wherein said notifier comprises means for notifying said prospective user to download said driver executable from said server.

25

32. The method of Claim 31, wherein said driver executable reads said signature and recognizes said software package as one containing data objects, wherein said software package requires access control by said driver executable.

30

33. The method of Claim 32, wherein said driver executable decrypts said usage authorization information, whereby said usage authorization is presented to said user.

34. The method of Claim 33, wherein said evaluating step further comprises the steps of;

35

selecting one or more use options from a listing of said use options available, said available options being those objects available free of charge or those previously purchased by said user, said listing being provided by said driver

executable accessing said usage authorization information, and wherein one or more of said available objects are retrieved by said driver executable and loaded into memory; and

executing said requested use.

5

35. The method of Claim 34, further comprising the step of:
purchasing any of said software product in entirety; and one or more parts thereof.

10

36. The method of Claim 35, wherein said purchasing step comprises the steps of:

providing user information;

optionally, electing usage levels and desired features;

providing payment information;

15

transmitting a purchase request to a server, said purchase request comprising said payment information and said desired usage information.

37. The method of Claim 36, wherein said payment information comprises credit card information and contact information for said prospective purchaser.

20

38. The method of Claim 37, wherein selected information characteristic of said user's computer system is transmitted to said said server receives server after said purchase request.

25

39. The method of Claim 38, wherein said selected information includes serial numbers from any of a hard disk drive, a network interface card, and a motherboard from said user's computer.

30

40. The method of Claim 39, wherein said selected information includes an identification code which identifies a particular storage medium on which said software package was distributed.

35

41. The method of Claim 38, wherein said server transmits an access control code to said user's computer after said purchase request is successfully processed, said access control code based on said selected information characteristic of said

user's computer, and wherein said access control code is separately stored on said user's computer from said software package.

42. The method of Claim 41, wherein said access control code is a decryption key for said encrypted first object, said encryption key based on said selected information, and wherein both said decryption key and said selected information must be present on said user's computer in order to decrypt said first object.

43. The method of Claim 42 wherein said encryption key is split into two parts, a first part of which is calculated on said server, and a second part of which is calculated in real time on said user's computer using said selected information.

44. The method of Claim 43, wherein said access control code is a decryption executable for said encrypted first object, said encryption executable based on said selected information, and wherein both said decryption executable and said selected information must be present on said user's computer in order to decrypt said first software version.

45. The method of Claim 1, wherein said software package includes means for protecting said software package against class attacks and dump attacks.

46. The method of Claim 45, wherein said protection against dump attacks comprises any of erasing and modifying one or more of said objects' relocation information, directory pointers, or entry point after said objects have been written into memory.

47. The method of Claim 45, wherein said protection against dump attacks comprises modifying references to external routines in an import table of said objects whereby said notifier controls access to said routines.

48. The method of Claim 25, wherein said server inserts transaction information in said software product as a watermark.

49. The method of Claim 41, wherein said server inserts transaction information in said software product as a watermark.

50. The method of Claim 25, wherein said server inserts transaction information in said access control code as a watermark.

51. The method of Claim 41, wherein said server inserts transaction information in
5 said access control code as a watermark.

METHOD AND APPARATUS FOR SECURE DISTRIBUTION OF SOFTWARE

5

ABSTRACT

Software is securely distributed with limited usage rights. The software may be an
executable program and/or one or more data files such as image or multimedia data
10 files. The software includes an access control object which prevents at least some
usage of the software without the use of a first access control code. The first access
control code is produced based on selected information characteristic of the user's
computer system. The access control code is produced in a server computer to
which the user directs a request for the access control code. The user makes a
15 payment to receive the access control code, which is then downloaded to the user's
computer system.

20

25

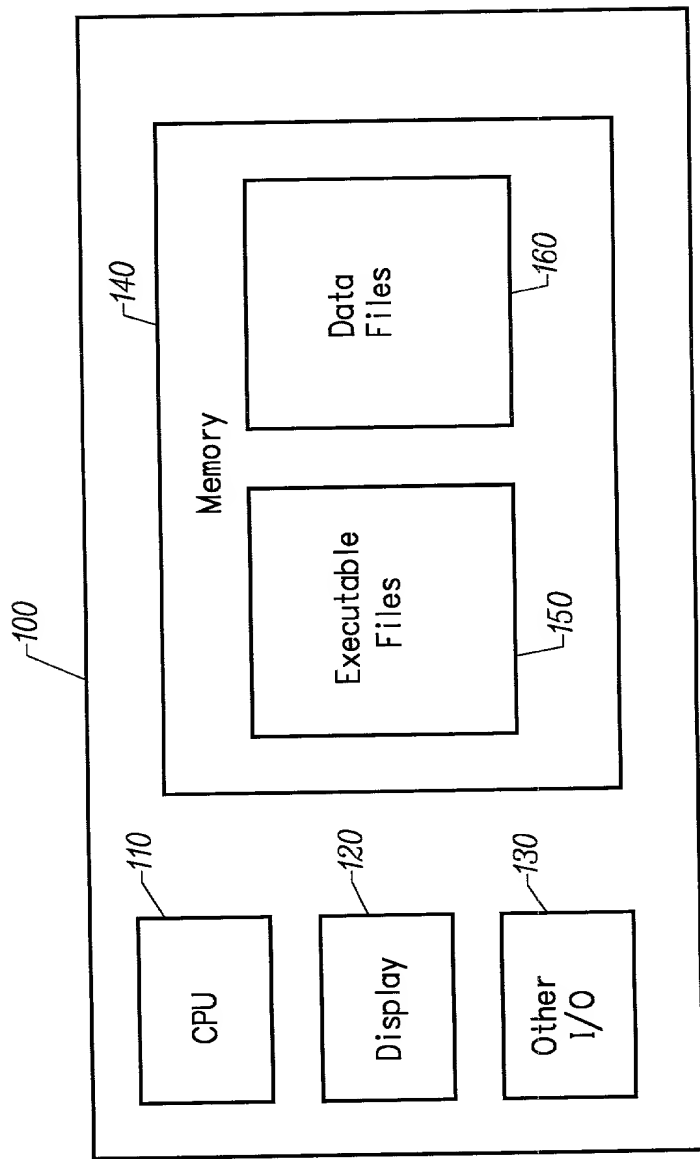


FIG. 1

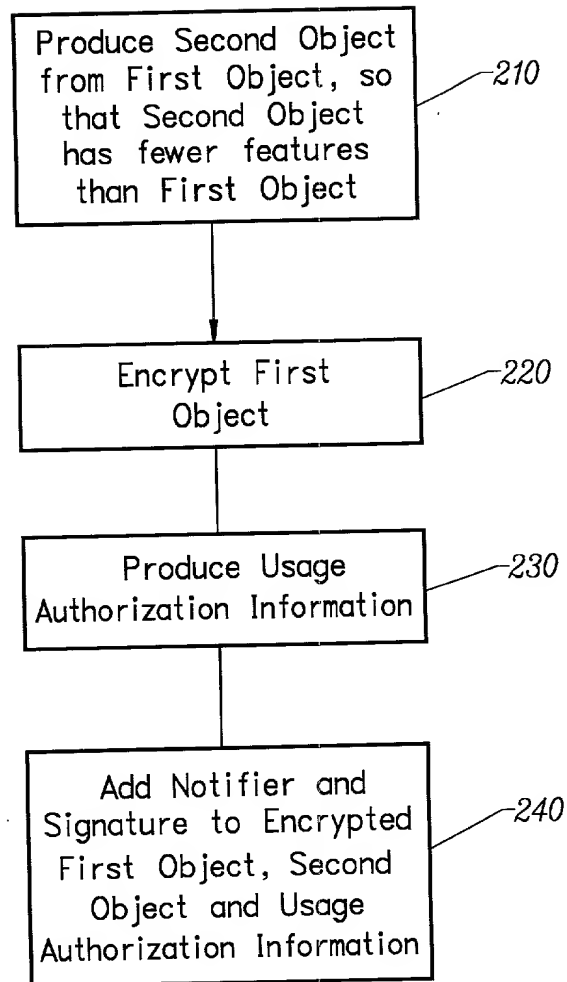


FIG. 2

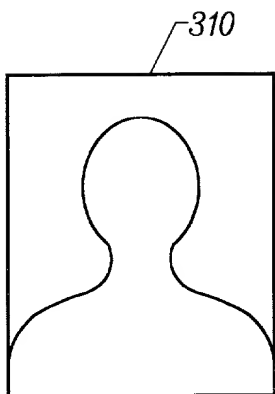


FIG. 3A

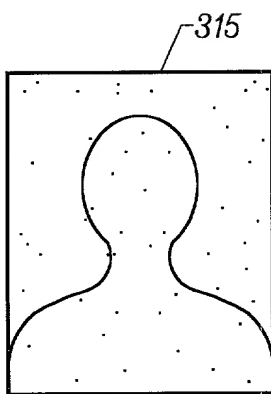


FIG. 3B

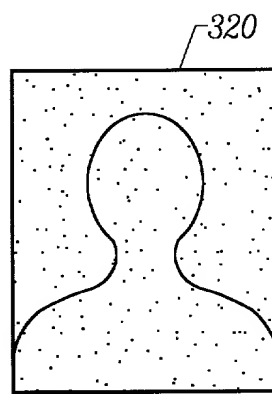


FIG. 3C

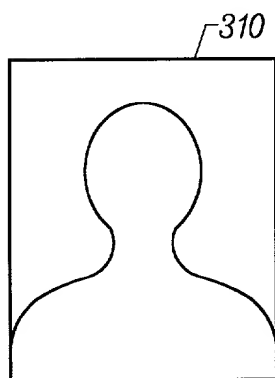


FIG. 3D

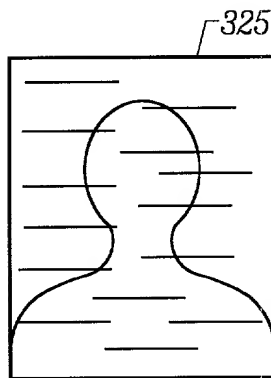


FIG. 3E

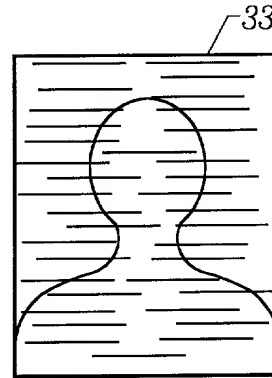


FIG. 3F

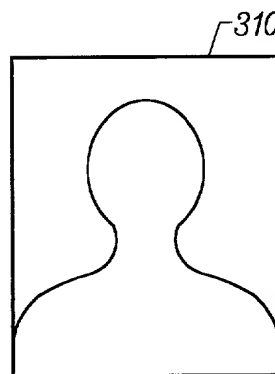


FIG. 3G

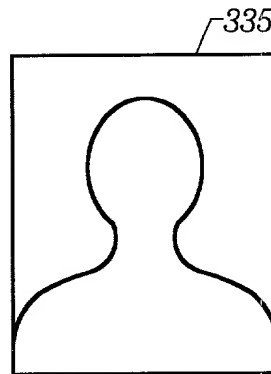


FIG. 3H

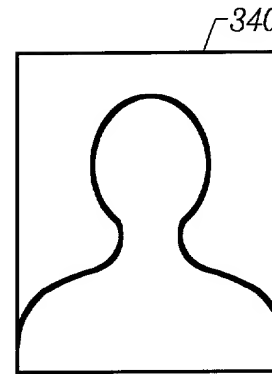


FIG. 3I

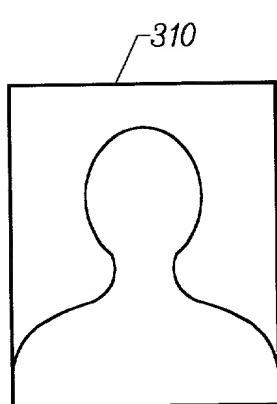


FIG. 3J

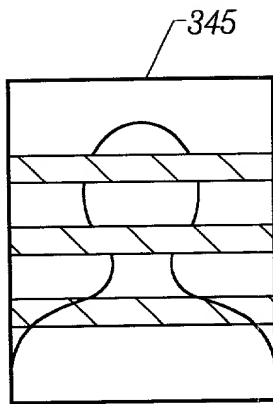


FIG. 3K

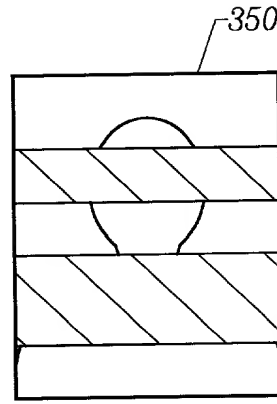


FIG. 3L

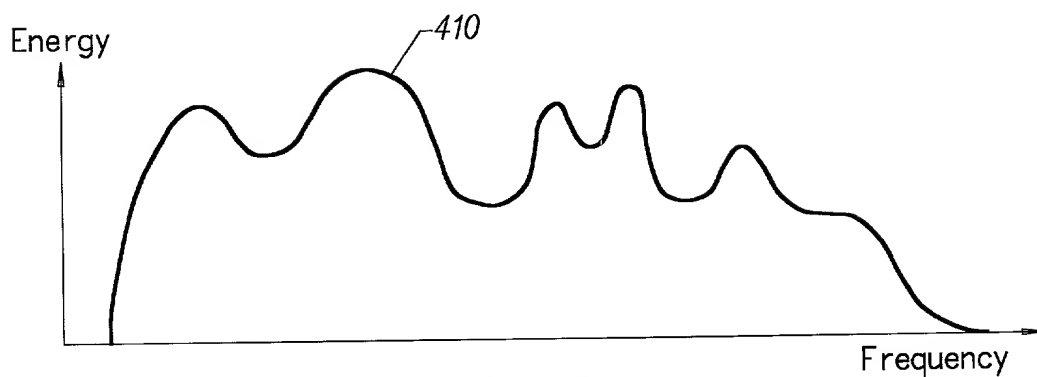


FIG. 4A

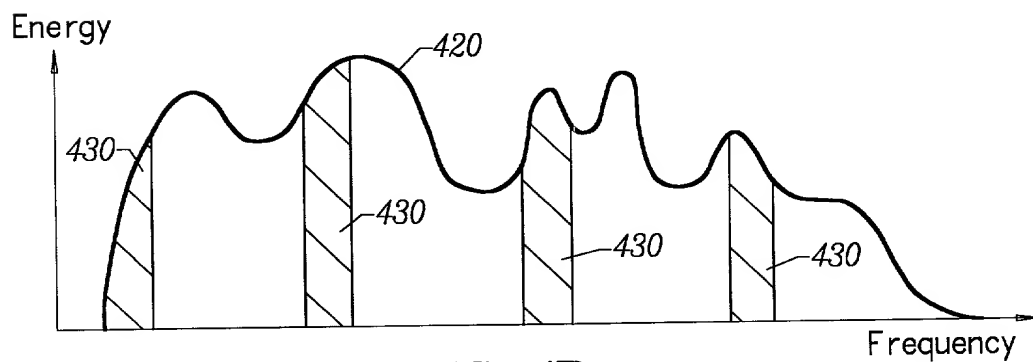


FIG. 4B

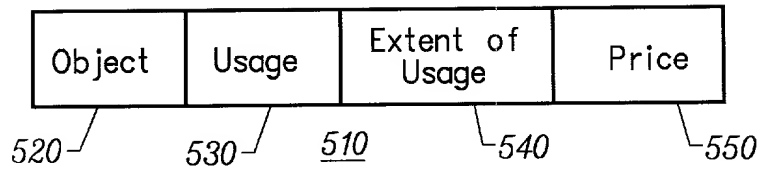


FIG. 5A

Types of Usage
View/ Listen/ Run
Print
Copy
...

FIG. 5B

Extent of Usage	Price
N Times	\$ Each Time
x Days	\$ Each Day
N Hours	\$ Each Hour
...	...

FIG. 5C

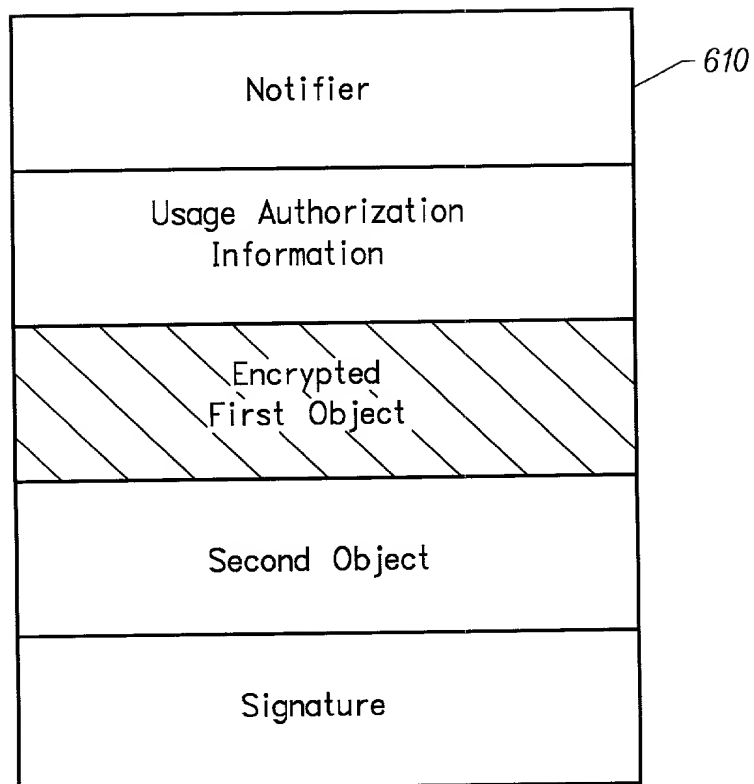


FIG. 6

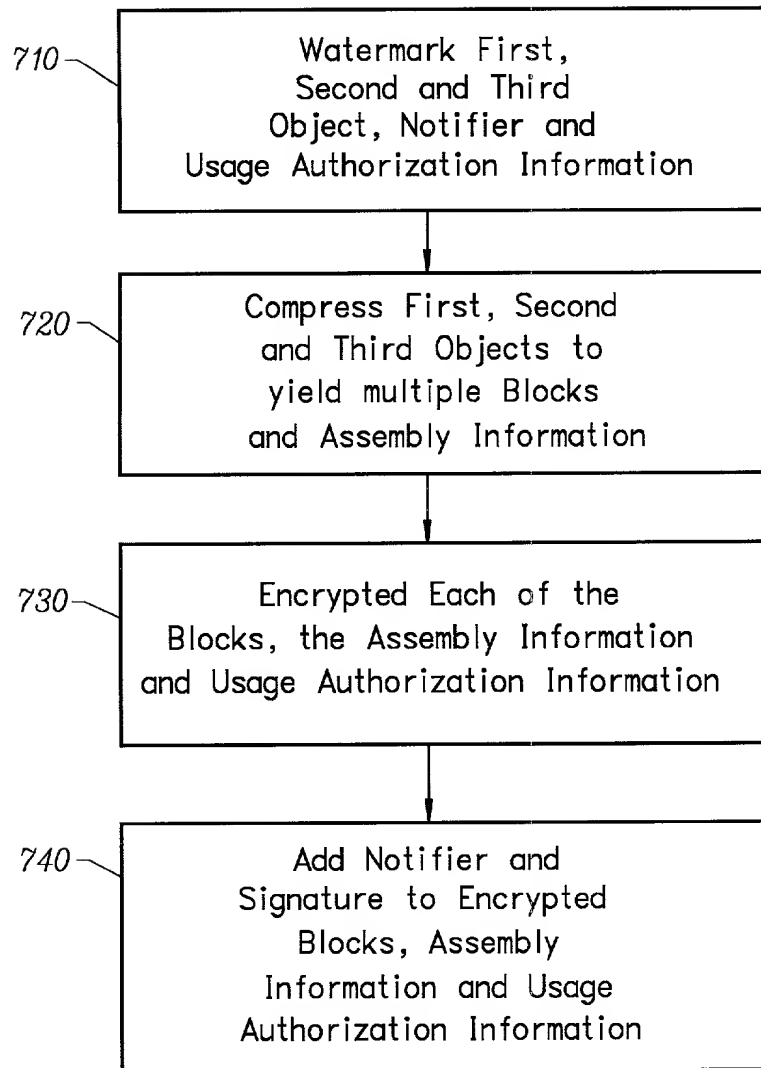


FIG. 7

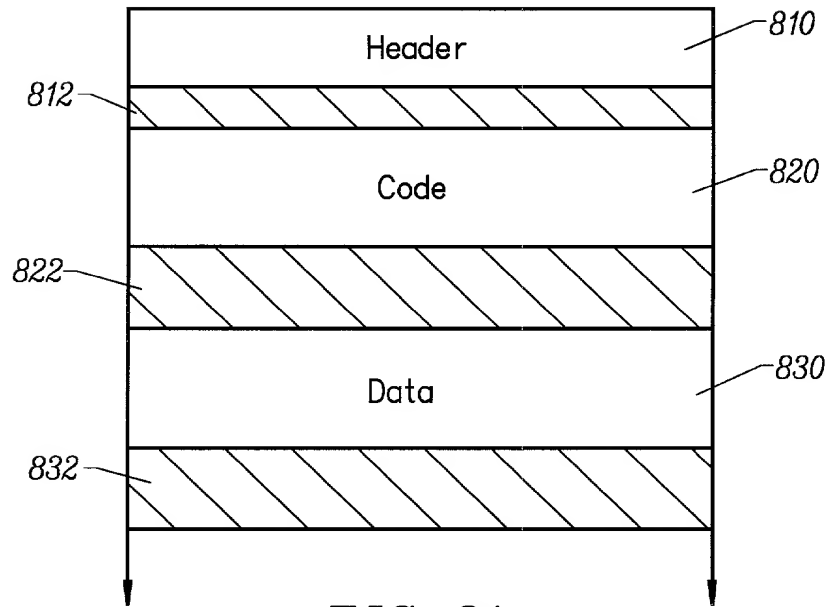


FIG. 8A

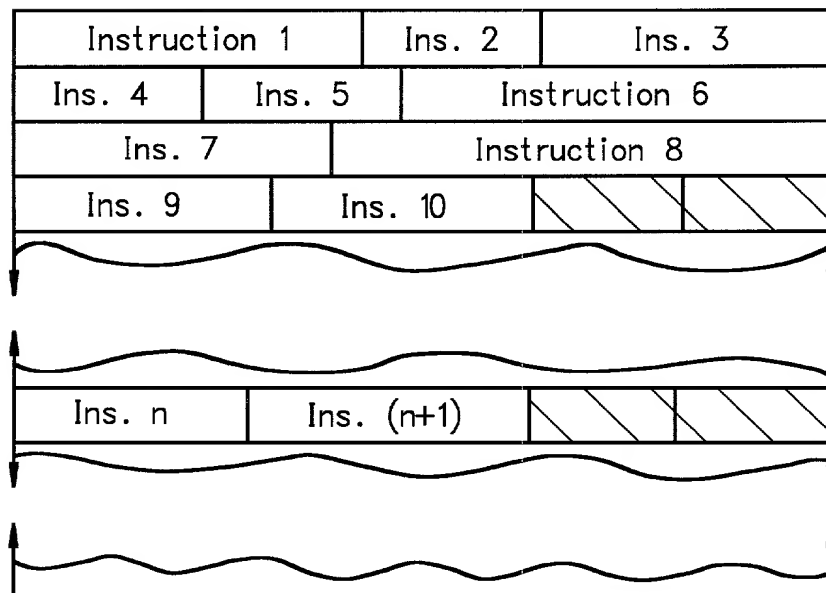


FIG. 8B

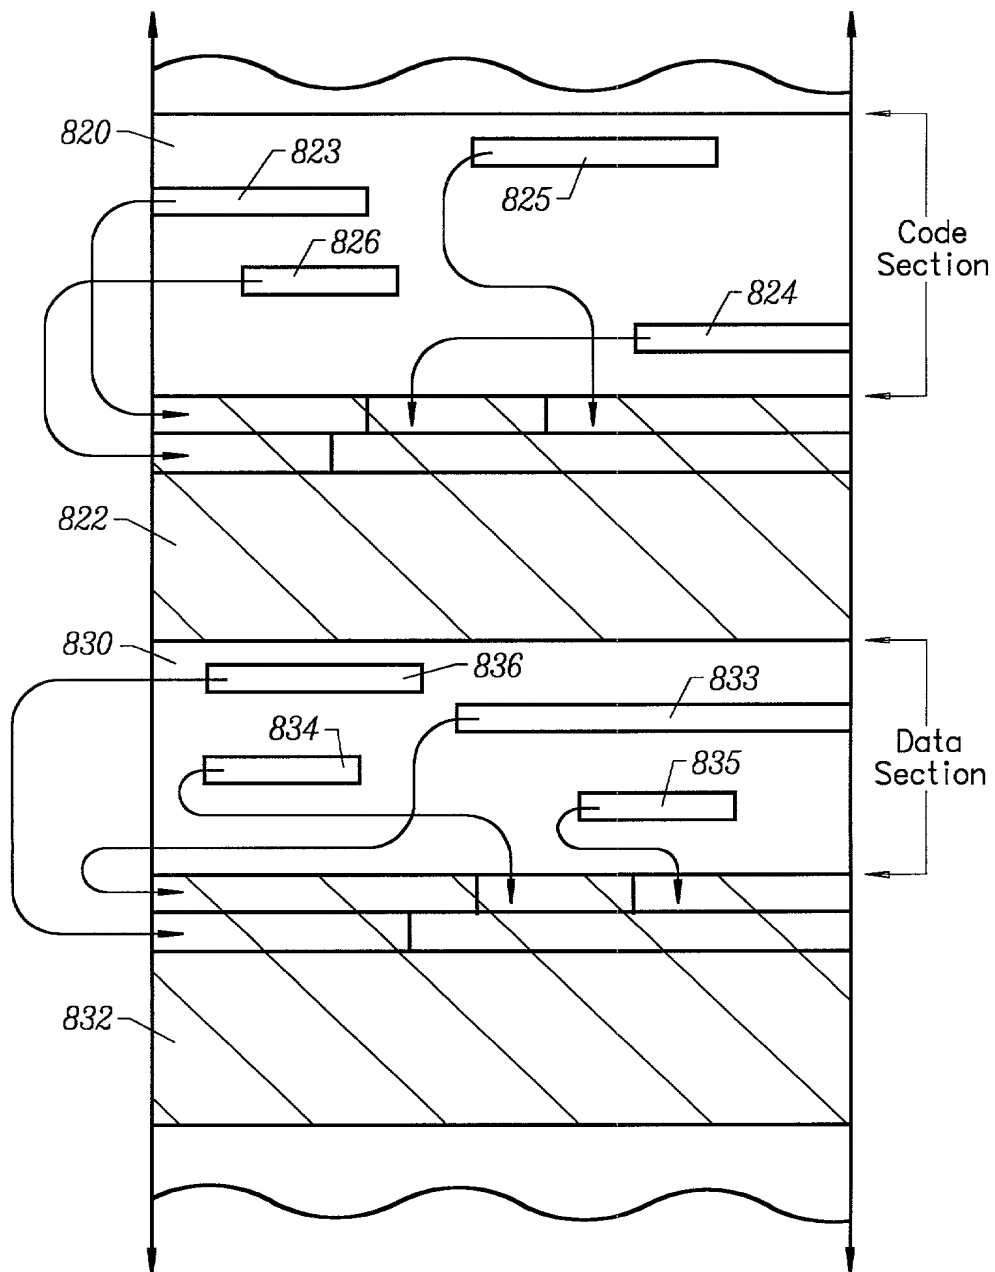


FIG. 8C

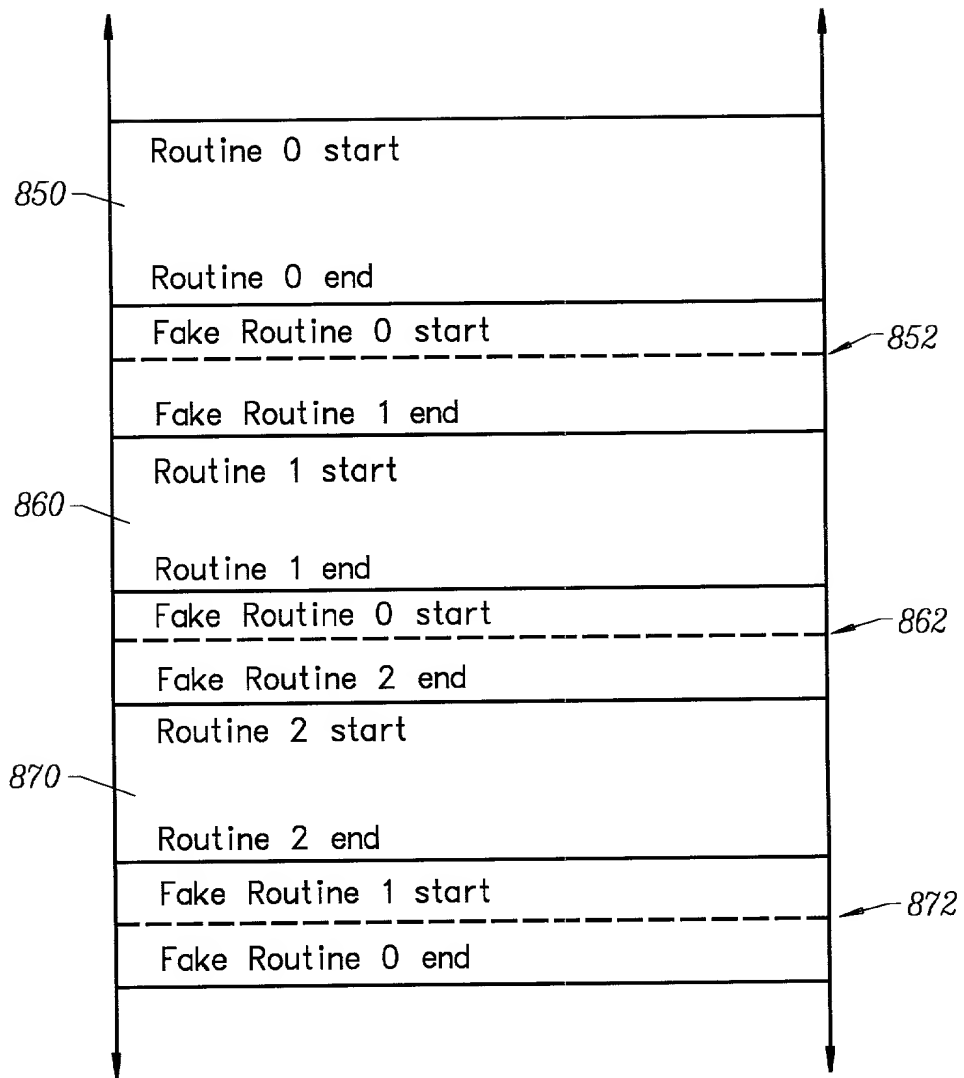


FIG. 8D

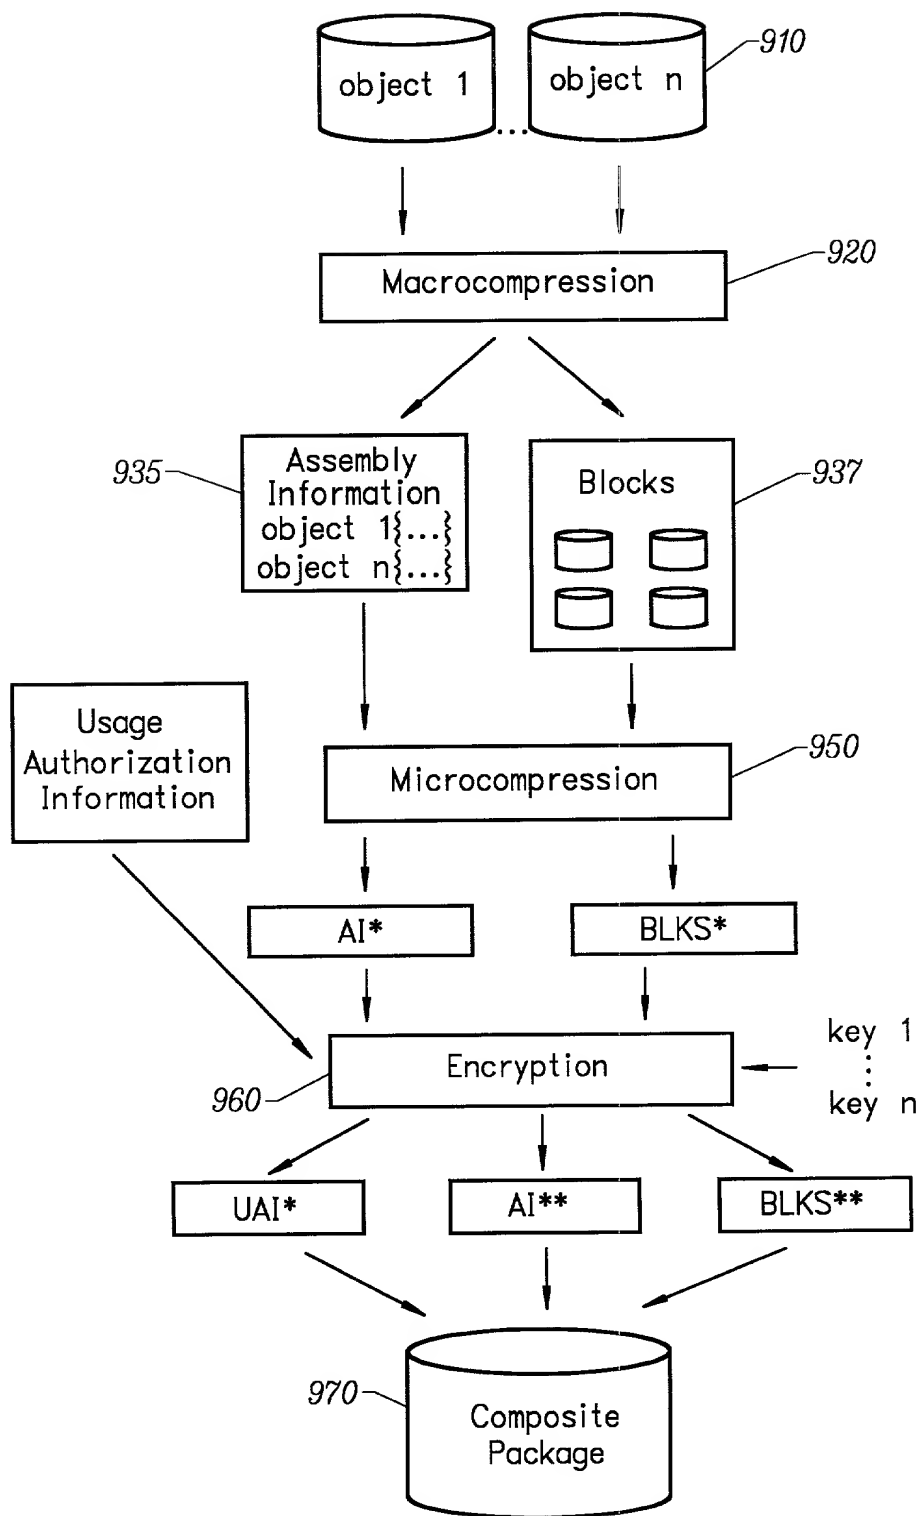


FIG. 9A

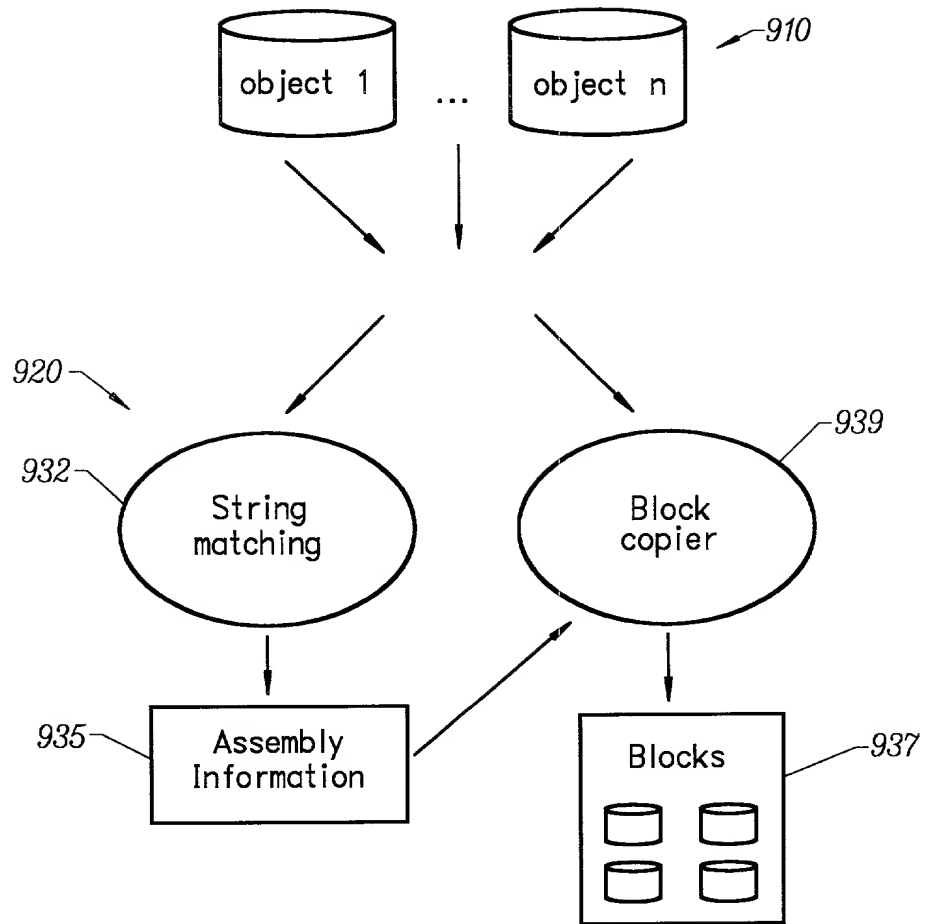


FIG. 9B

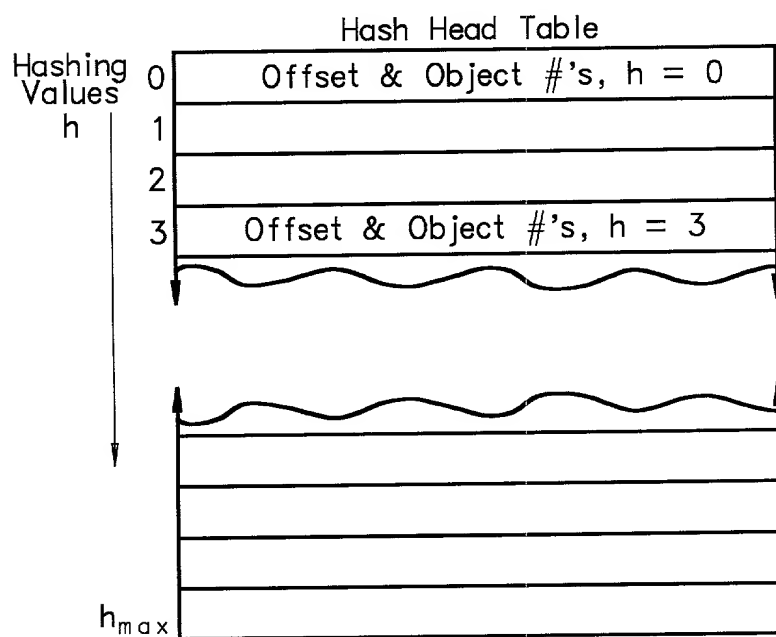
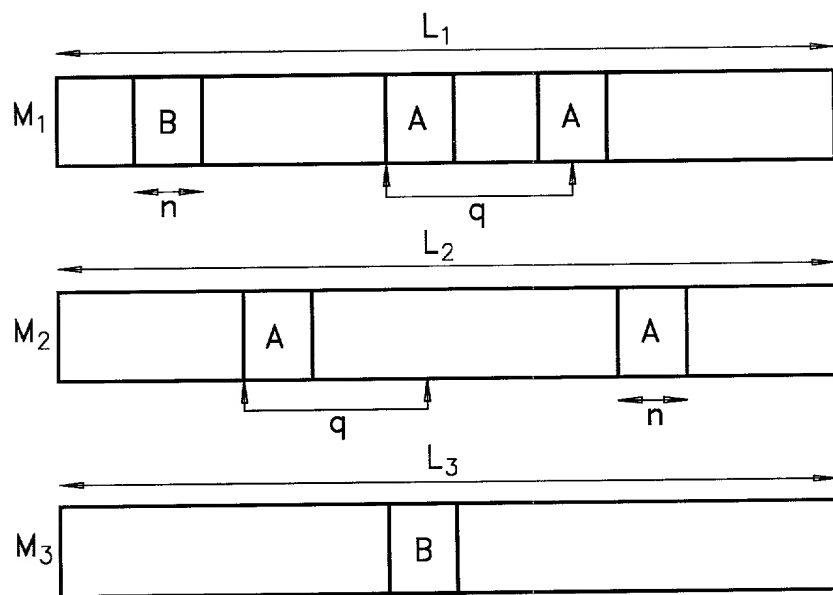


FIG. 9C

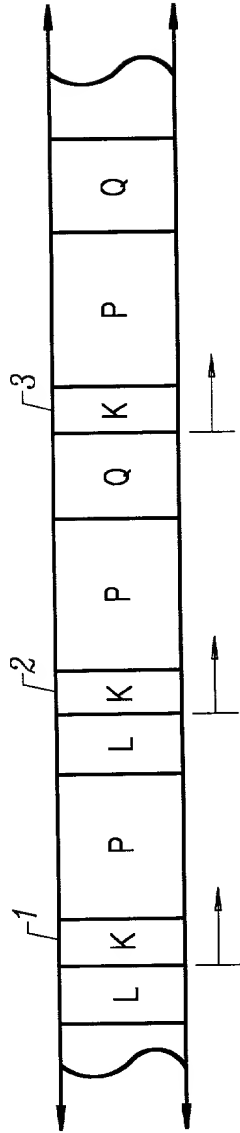


FIG. 9D

Strings	Matching Length
1, 2	K+P
1, 3	K+P
2, 3	K+P+Q

FIG. 9E

String ID	Source Offset	Length
1(Offset)	2(Offset)	K+P
2(Offset)	2(Offset)	K+P+Q
3(Offset)	2(Offset)	K+P+Q

FIG. 9F

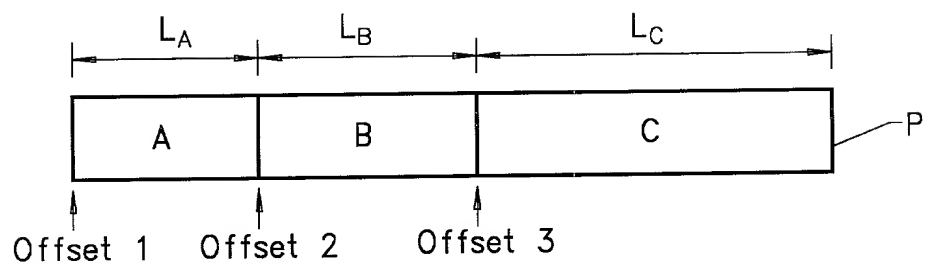


FIG. 9G

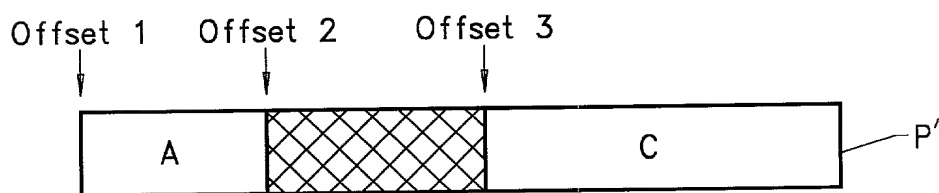


FIG. 9G

Segment	Source	Length
Offset 1	Off 1, P	L_A
Offset 2	0's	L_B
Offset 3	Off 3, P	L_C

FIG. 9H

Segment	Source	Length
Offset 1	Offset 1, P	L_A
Offset 2	Source Fct	L_B
Offset 3	Offset 3, P	L_C

FIG. 9I

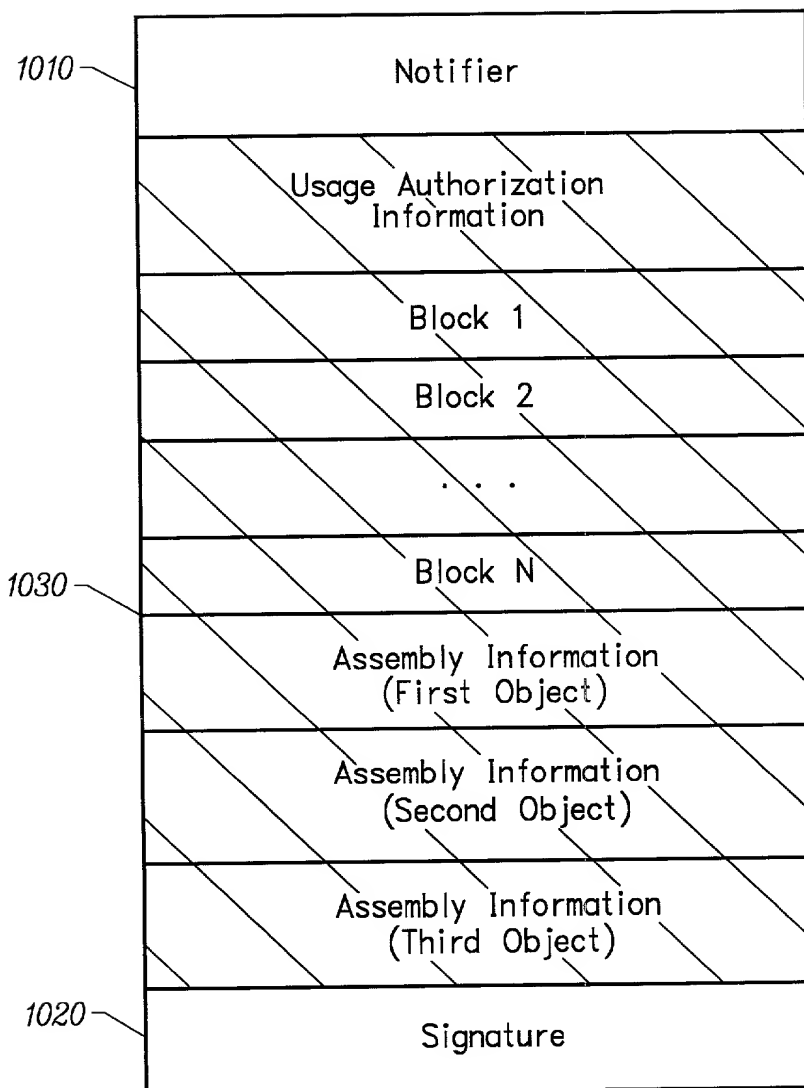


FIG. 10

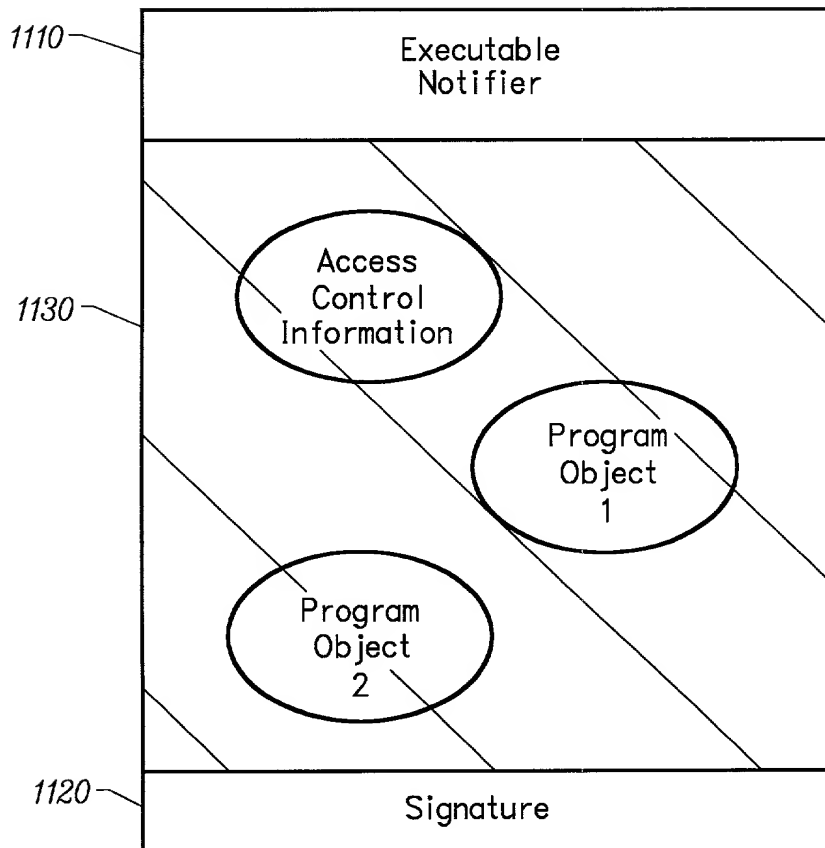


FIG. 11A

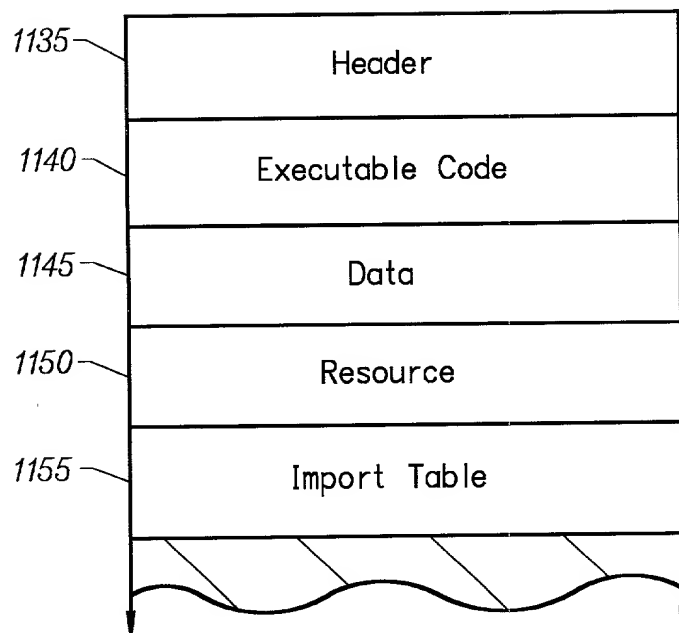


FIG. 11B

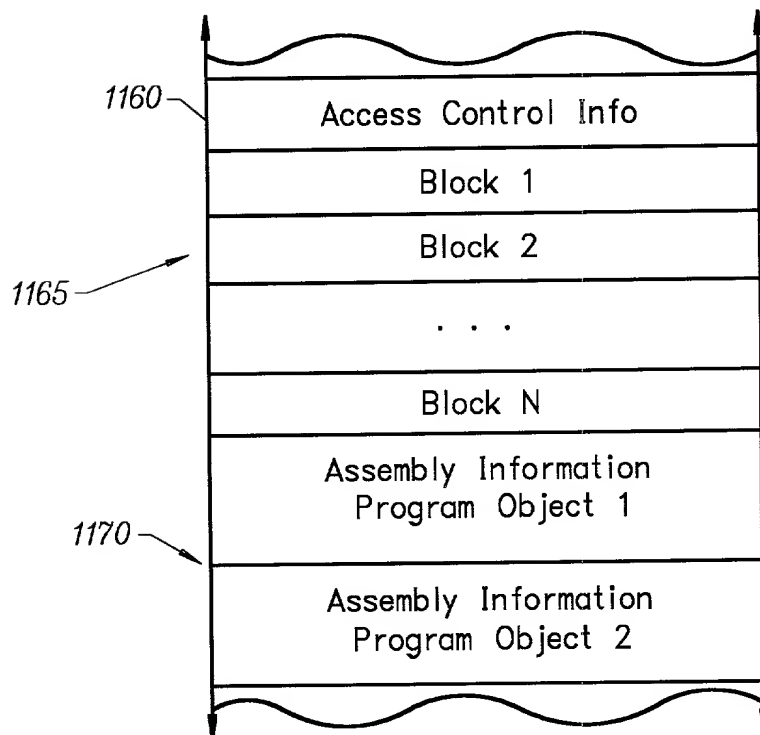


FIG. 11C

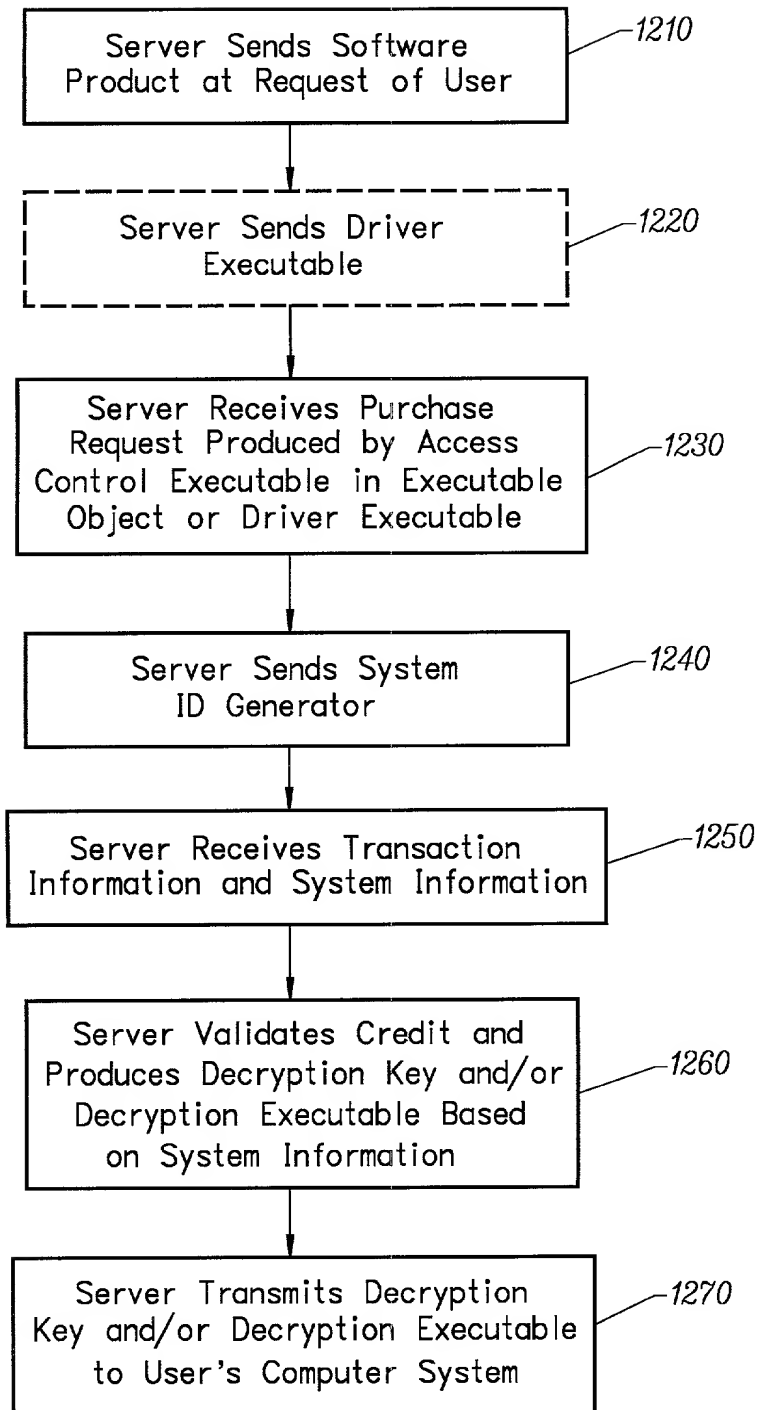


FIG. 12

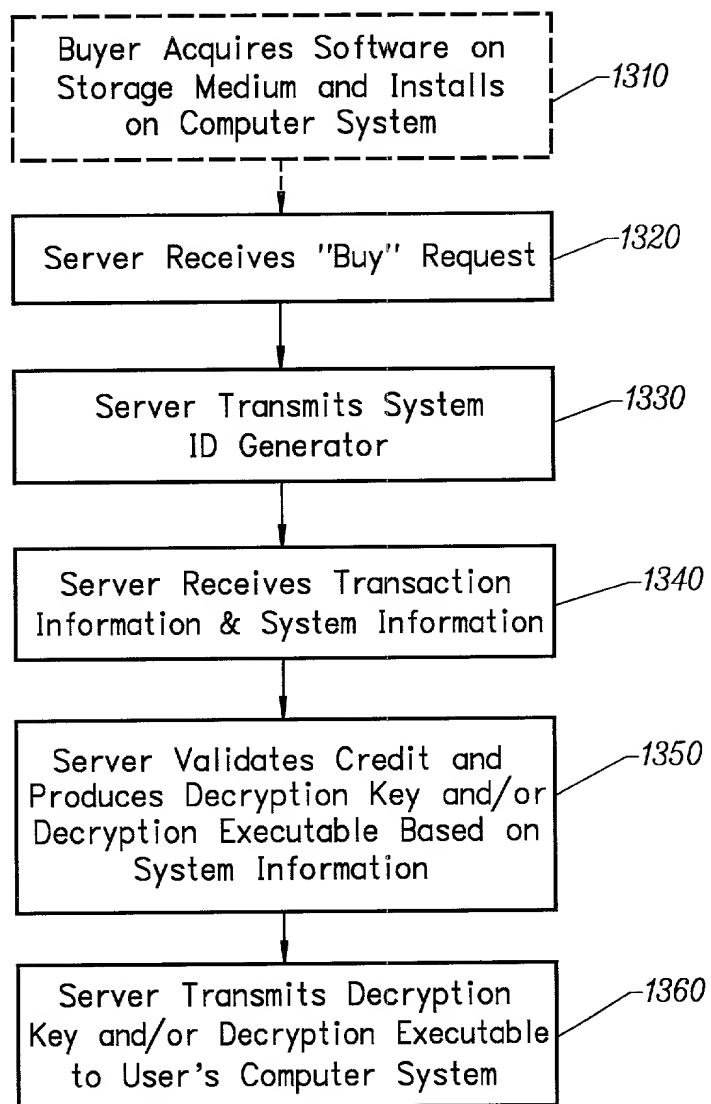


FIG. 13

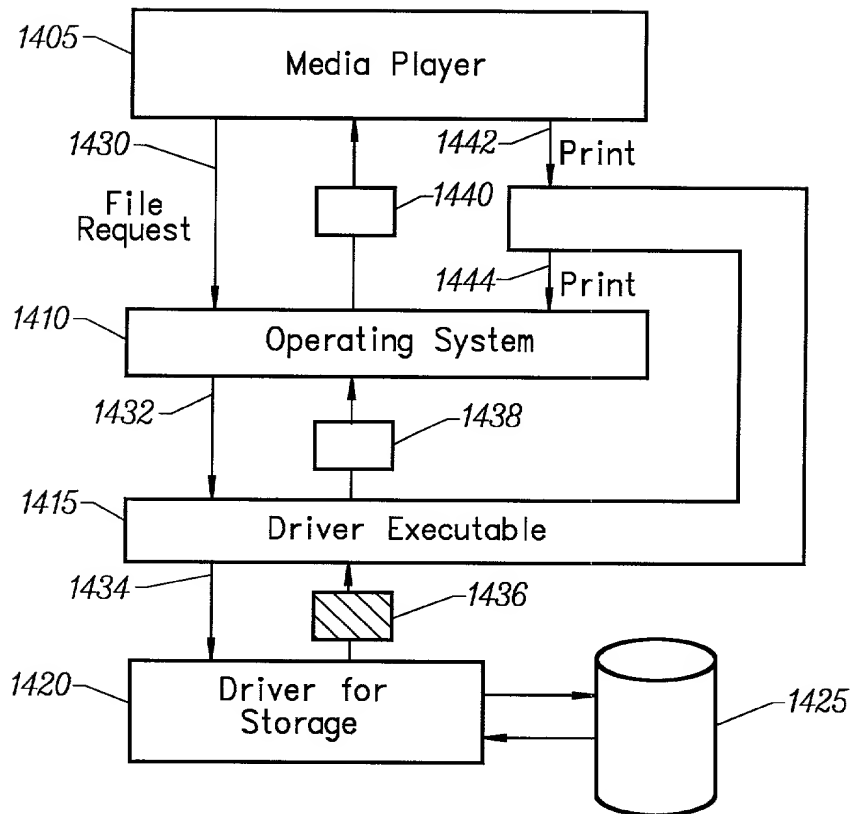


FIG. 14

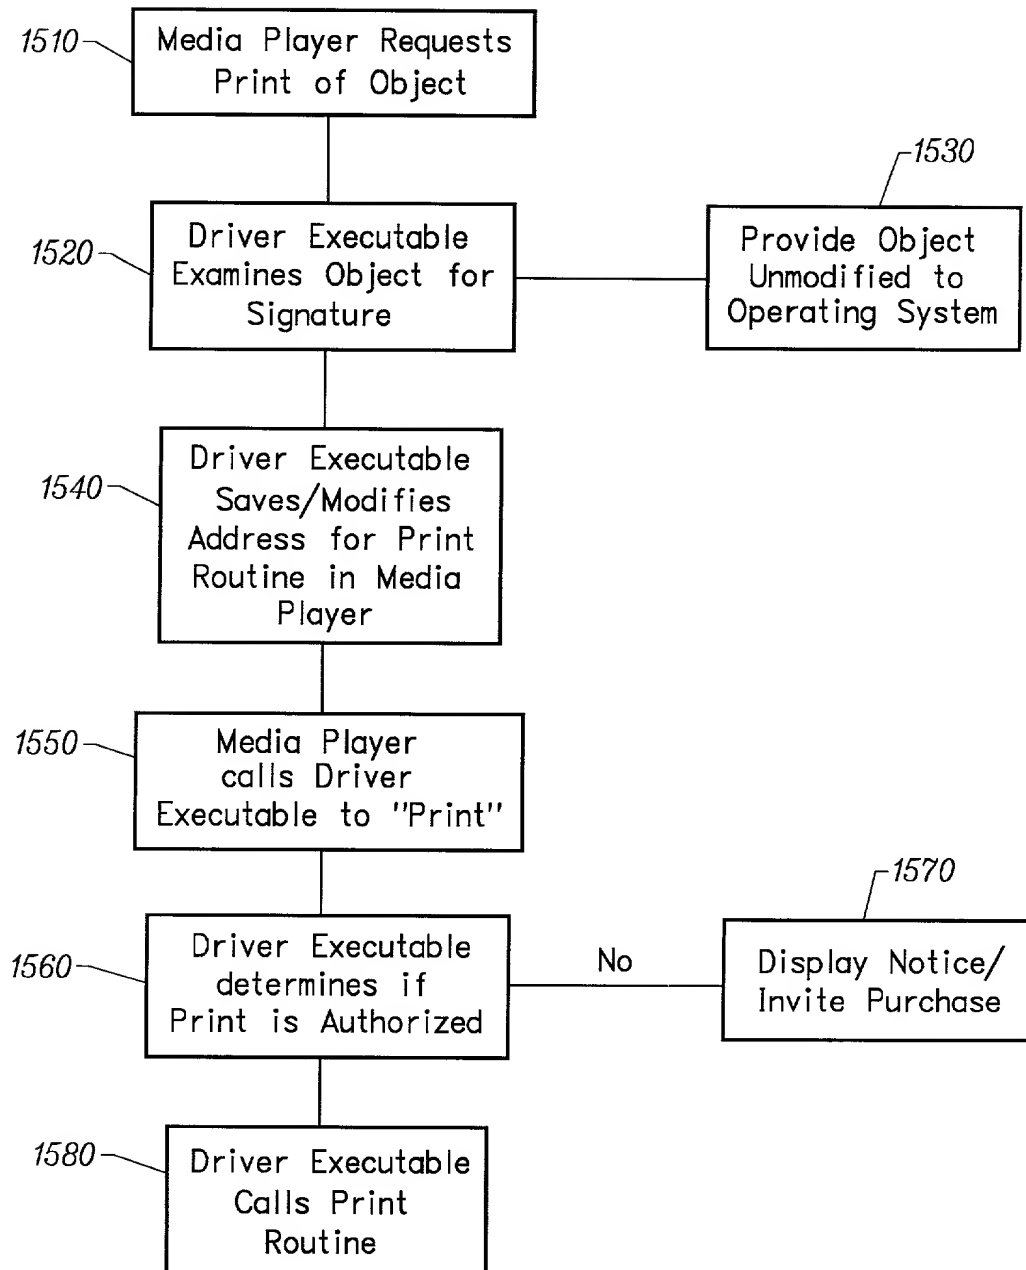


FIG. 15

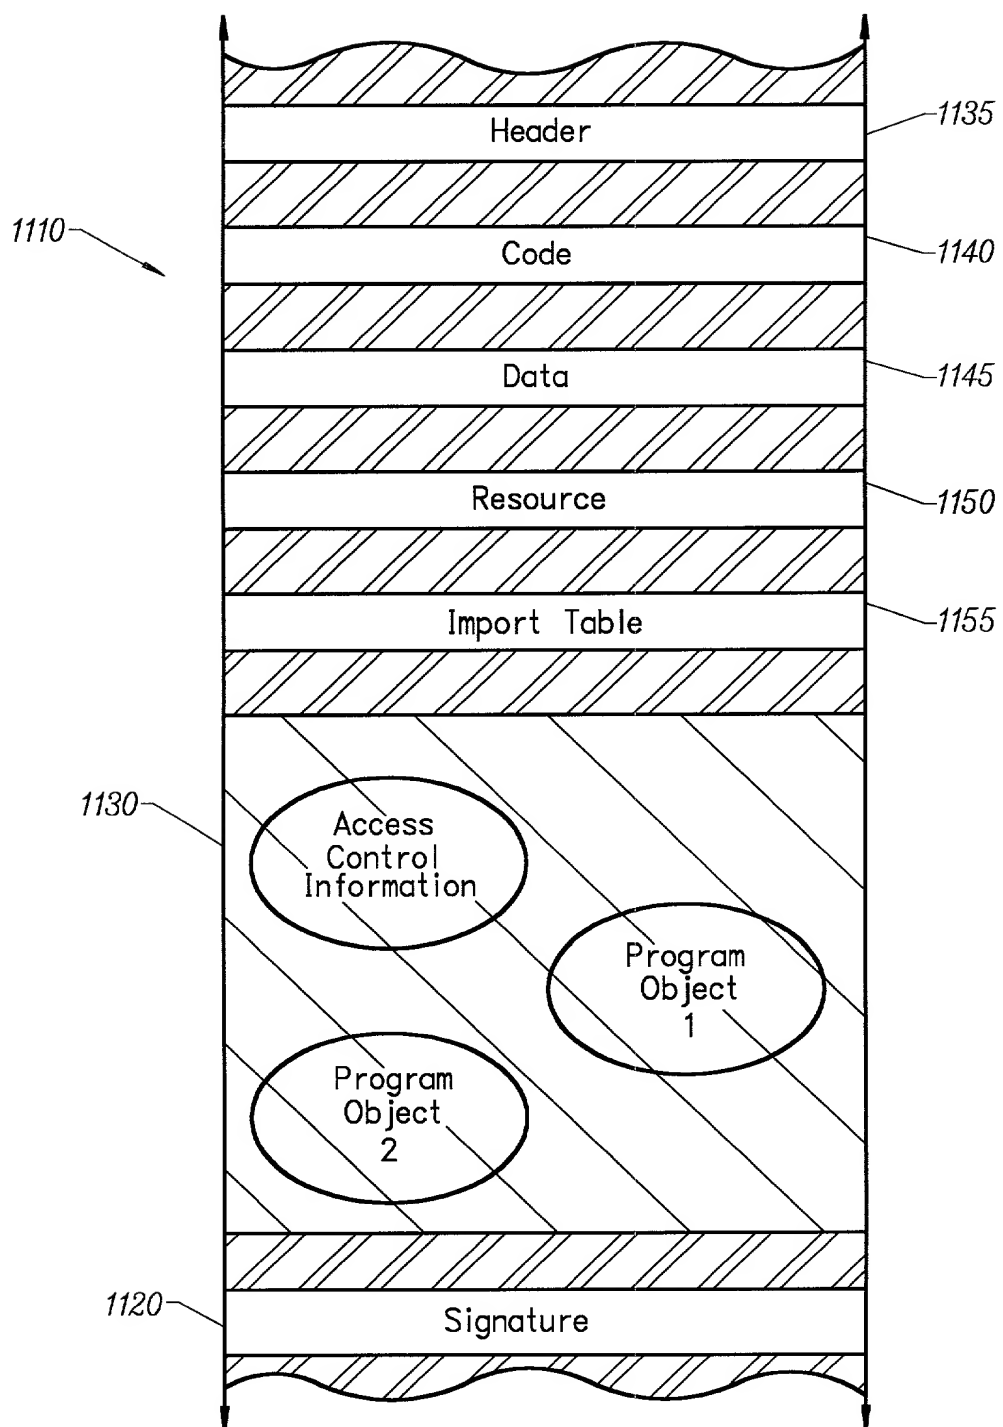


FIG. 16

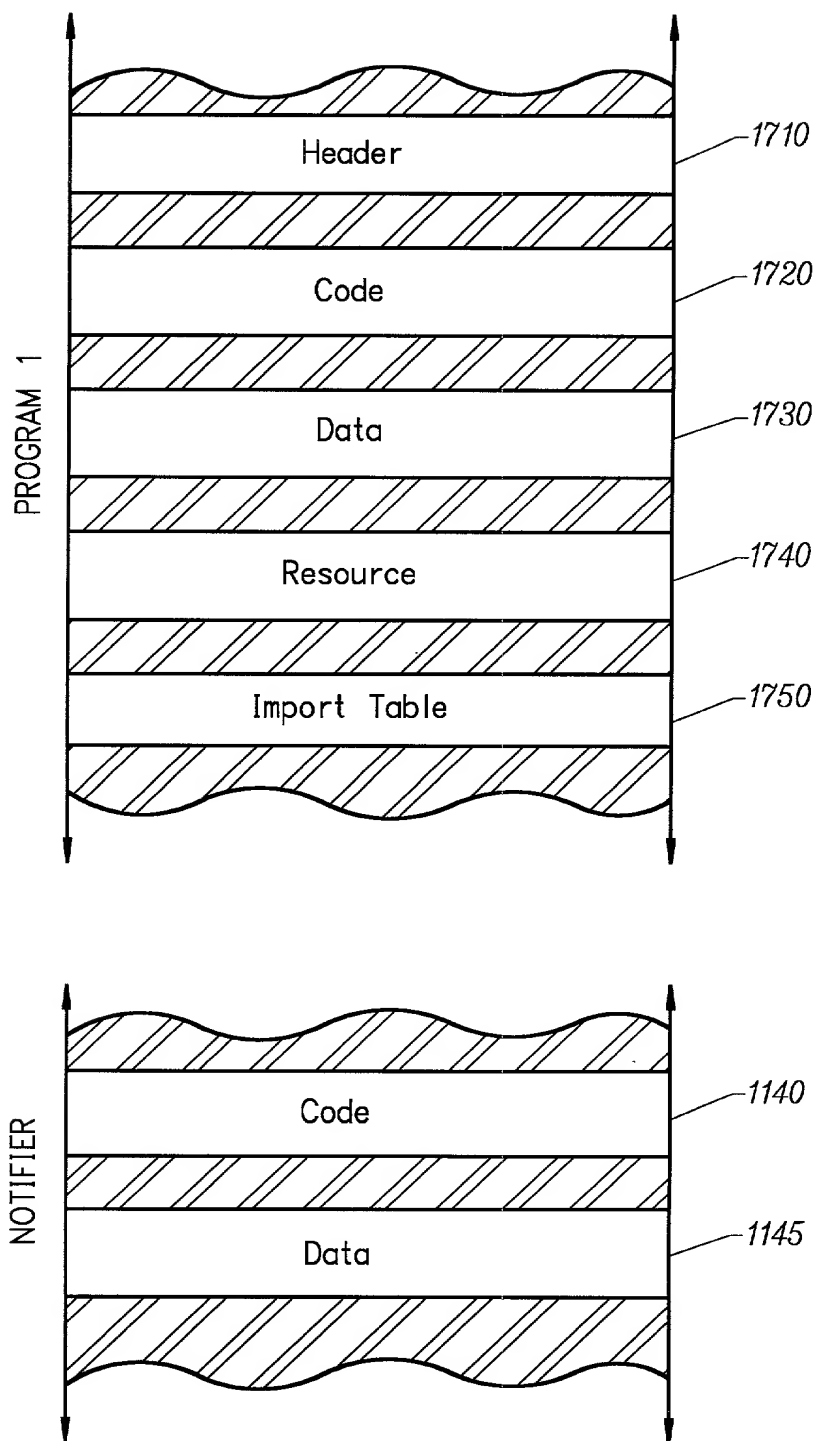


FIG. 17

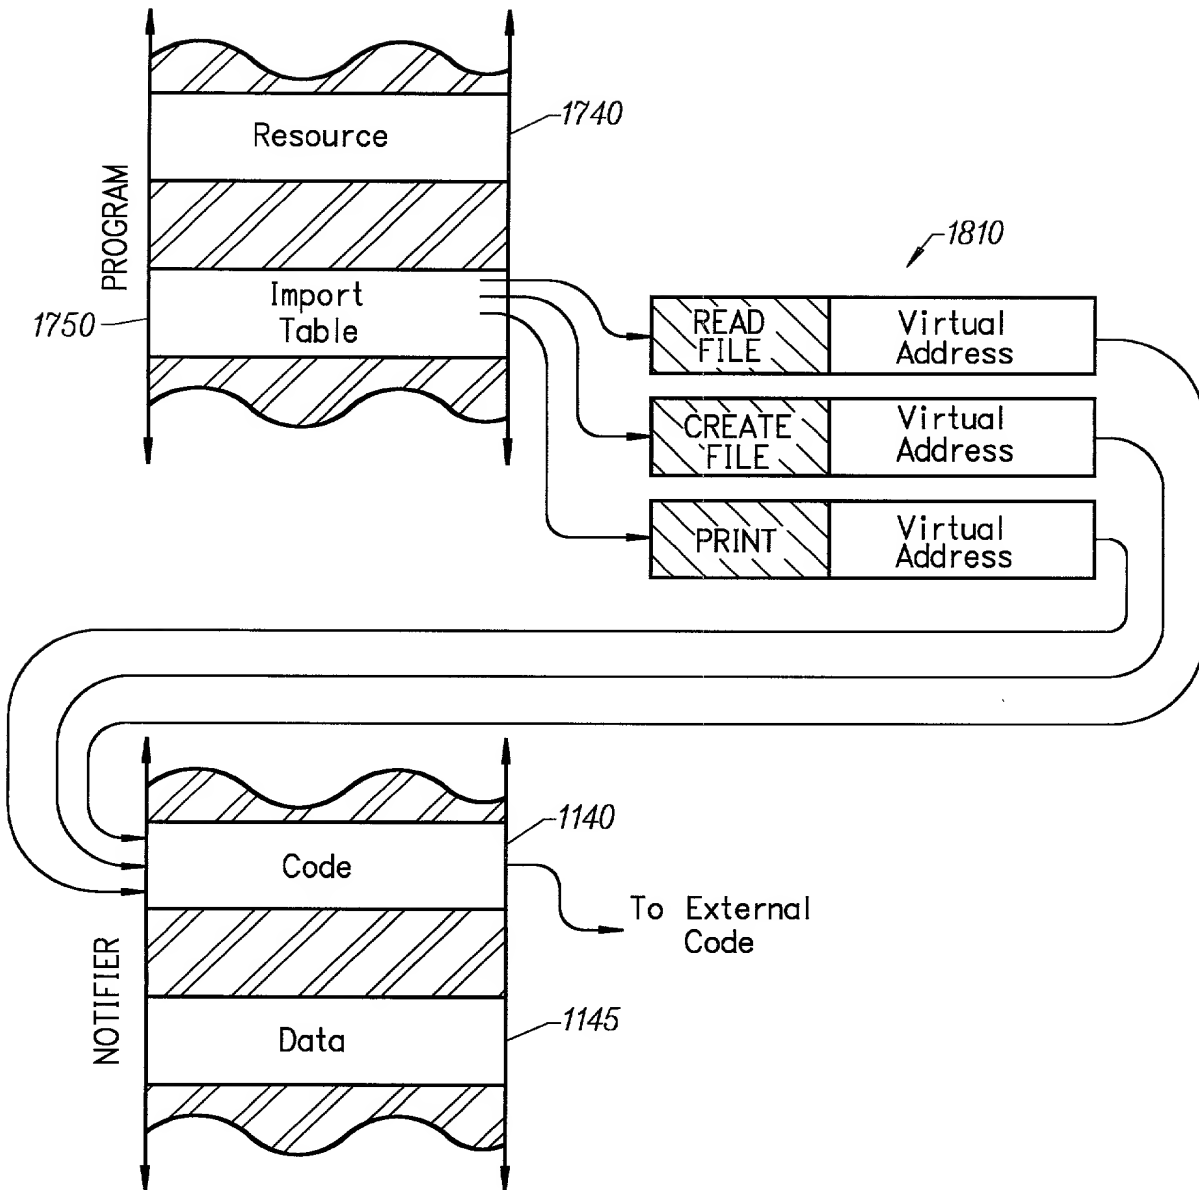


FIG. 18

DECLARATION FOR PATENT APPLICATION (JOINT OR SOLE)
(Under 37 CFR § 1.63; with Power of Attorney)
WHITMAN BREED ABBOTT & MORGAN LLP File No. 0088830-0004

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention ENTITLED:

METHOD AND APPARATUS FOR SECURE DISTRIBUTION OF SOFTWARE

the specification of which

_____ is attached hereto.

X was filed on June 9, 1999 as Application Serial No. 09/328,737

with amendment(s) through _____ (if applicable, give dates).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s) [list additional applications on separate page]: **Priority Claimed:**
Number: **Country:** **Filed (Day/Month/Year):** **Yes** **No**

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, Sec. 1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application:

Prior U.S. Application(s) [list additional applications on separate page]:

Appln. Ser. No.:	Filed (Day/Month/Year):	Status:(patented, pending, abandoned):
60/131,769	30/04/99	Pending


I hereby appoint Eugene L. Flanagan III, Registration No. 27,634, Nathaniel Levin, Registration No. 34,860, Barry Evans, Registration No. 22,802, Andrew L. Tiajolloff, Registration No. 31,575, Theodore J. Mlynar, Registration No. 40,096, Gregor N. Neff, Registration No. 20,596, and WHITMAN BREED ABBOTT & MORGAN LLP, or their duly appointed associate, my attorneys, with full power of substitution and revocation, to prosecute this application, to make alterations and amendments therein, to file continuation and divisional applications thereof, to receive the Patent, and to transact all business in the Patent and Trademark Office and in the Courts in connection therewith, and specify that all communications about the application are to be directed to the following correspondence address:

Eugene L. Flanagan III, Esq.
c/o WHITMAN BREED ABBOTT & MORGAN LLP
200 Park Avenue New York, New York 10166

Direct all telephone calls to: (212) 351-3120 to the attention of: Eugene L. Flanagan III

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

INVENTOR(S):

Signature:  Date: 5-AUG-1999

Full name of sole or first inventor: Andres Torrubia-Saez
Residence: Rambla Mendez Nunez, 34-1, 03002, Alicante, Spain
Citizenship: Spain

Signature: _____ Date: _____

Full name of 2nd joint inventor (if any):
Residence:
Citizenship

Signature: _____ Date: _____
Full name of 3rd joint inventor (if any):
Residence:
Citizenship:


Signature: _____ Date: _____

Full name of 4th joint inventor (if any):
Residence:
Citizenship

Signature: _____ Date: _____

Full name of 5th joint inventor (if any):
Residence:
Citizenship: Post Office Address(es) of inventor(s):

Note: In order to qualify for reduced fees available to Small Entities, each inventor and any other individual or entity having rights to the invention must also sign an appropriate separate "Verified Statement (Declaration) Claiming [or Supporting a Claim by Another for] Small Entity Status" form [e.g. for Independent Inventor, Small Business Concern, Nonprofit Organization, individual Non-Inventor].

I hereby certify that this transmittal of the below described document is being facsimile transmitted to the Commissioner of Patents and Trademarks, Washington, D.C., 20231, on the below date.			
Date of Deposit:	3/9/00	Name of Person Making the Deposit:	Vanessa Knowles
		Signature of the Person Making the Deposit:	

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Torrubia-Saez

Docket No.: TRYM0001

Serial No. : 09/328,737

Art Unit: 2766

Filed: June 9, 1999

Examiner: Unassigned

Title: METHOD AND APPARATUS FOR SECURE DISTRIBUTION OF SOFTWARE

March 9, 2000

Assistant Commissioner for Patents
Washington, DC 20231

**TRANSMITTAL OF REVOCATION OF POWER OF ATTORNEY
AND GRANT OF NEW POWER OF ATTORNEY**

Sir:

Enclosed is the Revocation of Prior Powers of Attorney and Grant of New Power of Attorney for the above-referenced patent application.

Please change the Attorney Docket No. from "0088830-0004" to --TRYM0001--.

Respectfully Submitted,



Michael A. Glenn,
Reg. No. 30,176

Customer No. 22862

PATENT

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of:

Tornubia-Saez

Serial No.: 09/328,737

Filed: June 9, 1999

For: Method and Apparatus for Secure Distribution of
Software

Group Art Unit: 2766

Examiner: Unassigned

REVOCATION OF PRIOR POWERS OF ATTORNEY
AND GRANT OF NEW POWER OF ATTORNEY

Assistant Commissioner for Patents
Washington, DC 20231

Sir:

As assignee of record of the entire interest of the above-identified application, all powers of attorney previously given are hereby revoked and the following attorneys and agents are hereby appointed to prosecute and transact all business in the U.S. Patent and Trademark Office connected therewith.

MICHAEL A. GLENN, Reg. No. 30,176
DONALD M. HENDRICKS, Reg. No. 40,355
KIRK D. WONG, REG. NO. 43,284
EARLE W. JENNINGS, Reg. No. 44,804
CHRISTOPHER PEIL, Reg. No. 45,005

Please send all correspondence for this application as follows:

Glenn Patent Group
Customer No. 22862
3475 Edison Way, Suite L,
Menlo Park, CA 94025

Please direct any calls to 650-474-8400.

Please change the Attorney Docket No. from "0088830-0004" to --TRYM0001--.

[illegible]

Date 3/8/2000

A handwritten signature in black ink, appearing to be "J. W. Smith". The signature is written in a cursive style with a large initial "J" and a long horizontal stroke extending from the end.